




# CATALOGUE 2021

electric fencing



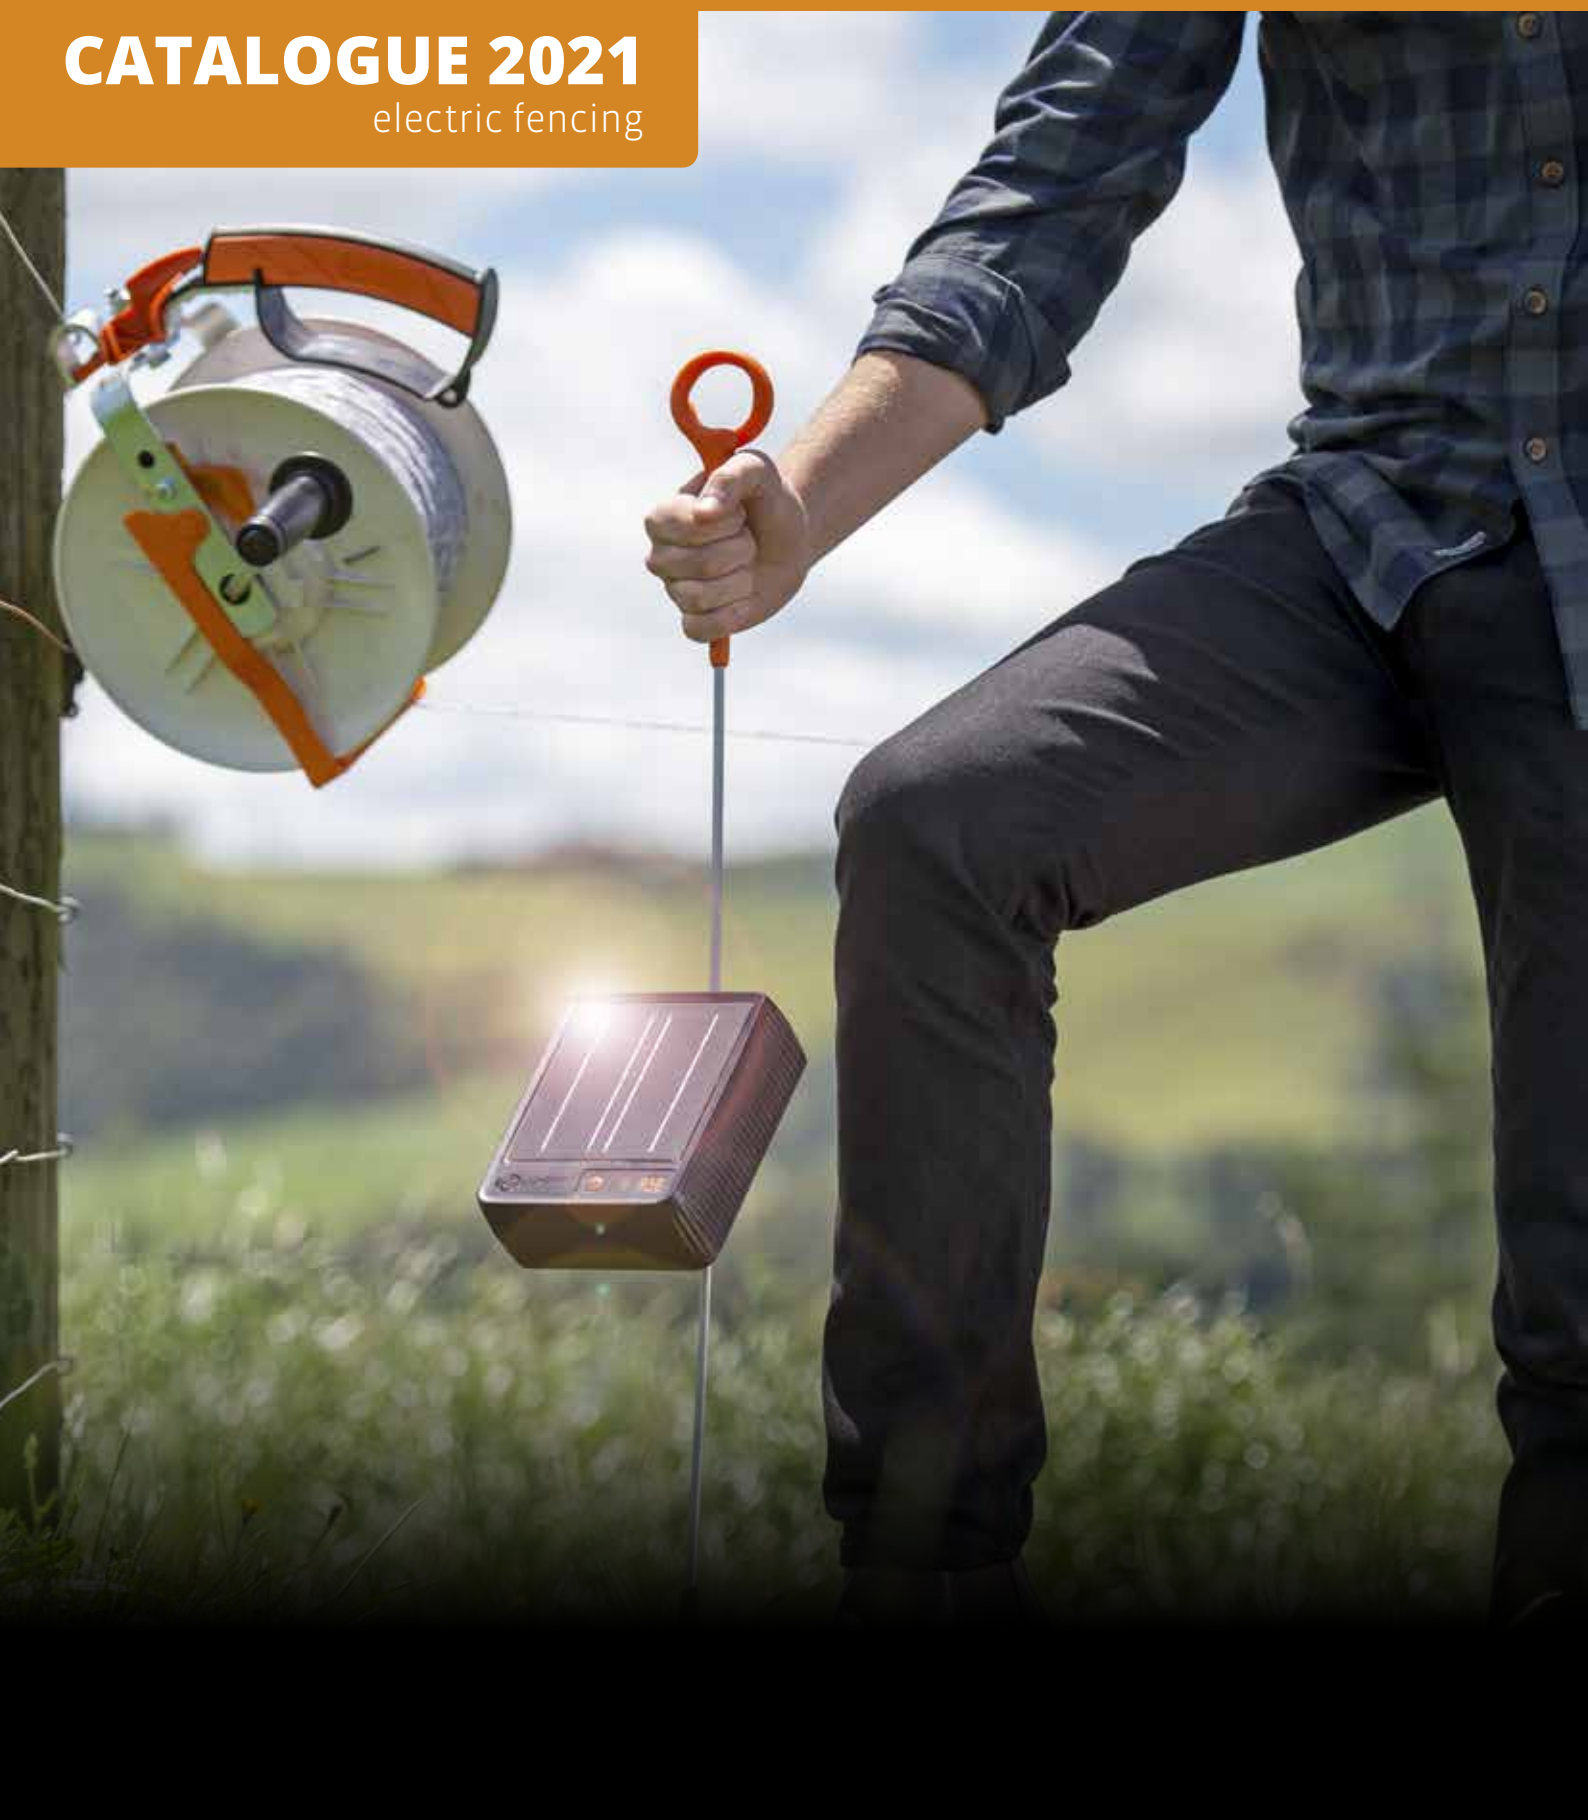





## Welcome to Gallagher

### Your specialist in electric fencing



Gallagher was founded in Hamilton, New Zealand in 1938, and has been the quality brand of electric fences for more than 80 years by now. With a large global distribution network, Gallagher is market leader in the electric fencing sector. We supply customers in a variety of markets, offering the most appropriate fencing solutions to either protect animals or keep other animals out.

Innovation has always been one of the main Gallagher spearheads. Our products are developed on the basis of an agricultural vision, and tested by end users. Once again this year, we have added a number of attractive and innovative products to our range. Take the new range of 9 V energizers for example. Whether you want to keep your animals under control, or to protect them against (wild) animals, Gallagher can always offer a suitable solution.


## Contents

How does an electric fence work?	4
New products & Promotions	6
i Series, general information	10
Energizers	12
230 V (Mains)	12
230 V/Battery (Multipower)	17
Battery (12 V/9 V)	21
Solar	27
Batteries and accumulators	31
Solar panels	33
Earthing	34
Boxes	36
Accessories	37
Testers	41
Posts	42
Conductors	48
Reels	54
Insulators	56
Connectors	65
Gates	66
Netting	70
Complete fencing sets	74
Tools	76
Exclusion fencing specialist	79
Horse-fly trap	80
Step-by-step installation	82
Wire heights	84
Gallagher check/Maintenance	86
W&EID	88
Birth Alarm	92
Technical specifications of energizers	94
Index	99



## How Electric Fencing Works

A short, safe and memorable shock to create a psychological as well as a physical barrier.

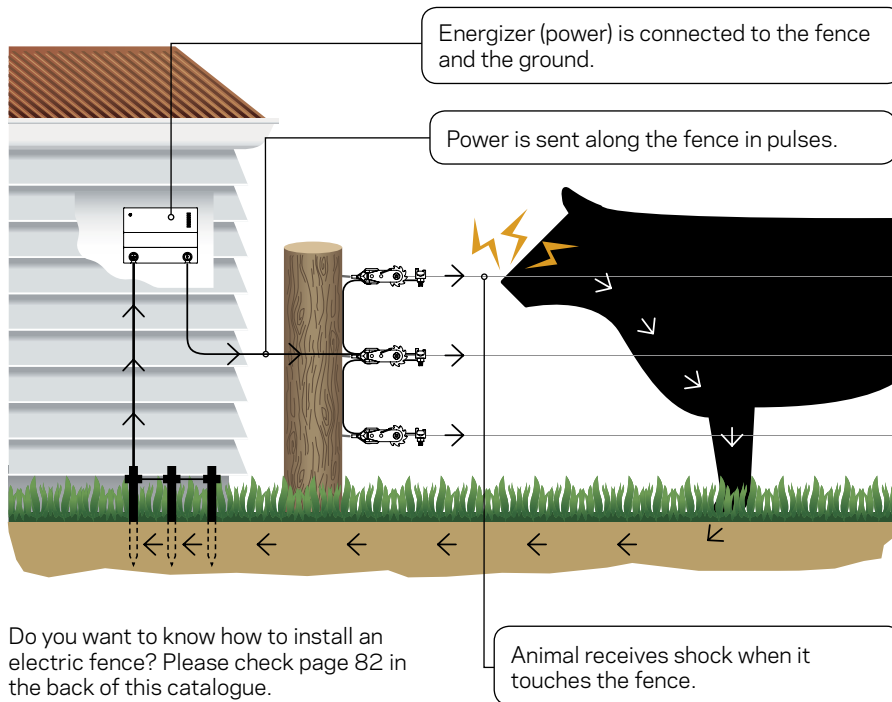

### SAFE

Animals remember and develop a respect for the fence

### DURABLE

Stock pressure on your fence is reduced so it lasts longer

### EASY TO INSTALL

Less than half the time to build vs a non-electric fence

### ECONOMICAL

Costs less to build and maintain than a non-electric fence





# Getting Started...

Every electric fence system is made up of an energizer, a grounding system and a fence system.

Selection of these systems depends on property size, fencing usage and animal type.

1. **What animals do you want to keep in or out?**
2. **Total area to be fenced**
3. **What power source will you use for your energizer?**

Gallagher 230 Volt energizers are the best and most economical choice for areas where you have reliable power. Solar/Battery or Solar powered energizers are the most logical for remote areas.

#### 4. **Do you need a permanent, offset or temporary/portable fence?**

- **Permanent:** Long life, permanent electric fences for highly effective animal control that lasts a lifetime.
- **Offset:** Protect and extend the life of an existing conventional non-electric fence by adding electric wire(s).
- **Temporary/Portable:** Easy to transport, assemble and take down allowing flexible fencing for short-term animal control or rotational grazing

Find out what your ideal fence is!

Try the Gallagher fence configurator.



<https://www.gallagher.eu/compose-electric-fence>



At Gallagher, we work non-stop to refine and extend our range. In 2021 therefore, we will once again be introducing a number of innovative products to both protect your animals and to keep out unwanted guests (predators). We are proud to once again present you with attractive products, based on our customer research.

## The new Solar devices



p. 29

### S6 solar fence energizer

Keeps unwanted animals out and your pets in. The S6 is a compact, portable and reliable solution for the longterm protection of your garden and pets.

**349008** S6 incl. Lithium battery

 = 1




p. 29

### S12 solar fence energizer

A compact, portable and reliable energizer. With the built-in earthing and the latest solar technology, portable electric fencing has been taken to new heights. Suitable for fencing of up to 1.5 km.

**349015** S12 incl. Lithium battery

 = 1

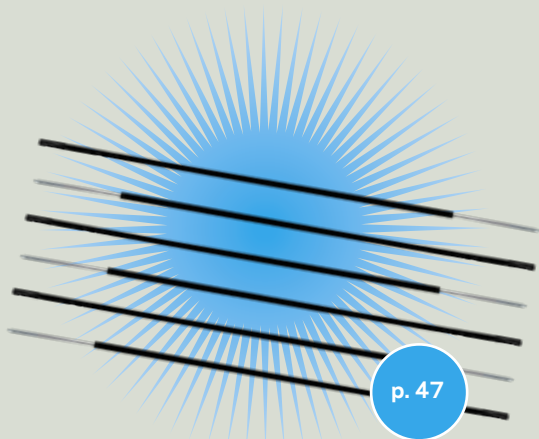


p. 47

### Plastic post 13mm 0.98M black (10)

Black plastic fencing post with a maximum fencing height of 80 cm. Ideal as an expansion for the dog and cats garden kit (art no 083091) or the solar pet kit (art no 084197).

**083817** Plastic post black 13mm 0.98m (10)

 = 10

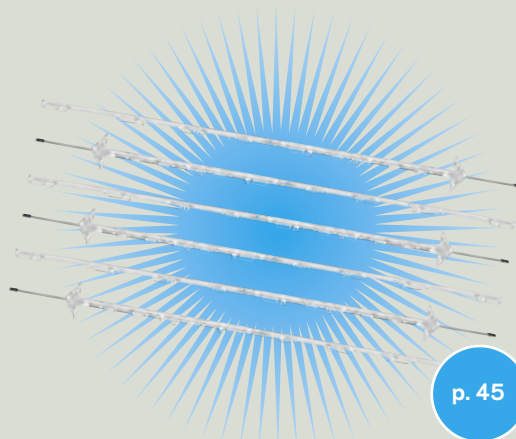

p. 45

### Plastic post 1.50M white (10)

White plastic post with a total height of 1.55 m, with a maximum fencing height of 1.30 m. Fitted with 14 offsets.

**084500** Plastic Wolf post 1,50m, white (10)

 = 10



## Complete solar solution

A fully pre-installed solar station for the MBS2800i and MBS1800i.  
Maximum control, power and protection all in one.



<b>083053</b>	Solar Powerstation MBS2800i	☼ = 1
<b>083060</b>	Solar Powerstation MBS1800i	☼ = 1
<b>083077</b>	Solar Powerstation MBS800	☼ = 1

p. 30

## TurboStar Equiwire

- Even safer fencing for horses
- Developed and produced in New Zealand
- With a 10-year warranty

Superior conductivity



p. 49

## Our protection kits



p. 74

<b>083091</b>	Garden kit 80cm with M35 230V	☼ = 1
<b>083107</b>	Garden kit 50cm with M35 230V	☼ = 1
<b>083121</b>	Cat kit for fence with M10	☼ = 1

<b>NEW</b>	<b>083138</b>	Marten kit with M50 230V	☼ = 1
<b>NEW</b>	<b>084197</b>	Pet kit 80cm S6 Solar*	☼ = 1

\* Available: June 2021







## S10 solar



341309

- Farm proof thanks to the sturdy housing.
- Suitable for fencing of up to 1 km.
- Quick and easy to install!
- Including accumulator.

## M2800i + free remote control

306315

- Powerful mains device
- Maximum control thanks to the external display.
- Keeps you informed of the fence performance.
- Find the exact location of the fault in the fence or switch the fence on or off using the remote control.



## Reel + 500 m plastic wire

061184

- Reel with geared mechanism.
- Large handle with knuckle protection.
- Includes 500 m plastic wire.
- Includes multi-use gate handle







## Bucket of 175 BS insulators

079537

- With free bucket!
- For attaching wire or 12.5 mm tape to a wooden fencing post
- No metal core, to prevent short-circuiting



## Gate handle with N-hook

072408

- Gate handle with compression hook for easy use.

# Extra discount on duo packs!



**065073** Duopack Alkaline battery 2x 9V/175Ah - 190x125x160mm ☞ = 2

**069330** Duopack Vario post white 1,00m (2x10) ☞ = 20

**072507** Duopack Vario post terra 1,00m (2x10) ☞ = 20

**069798** Duopack White - 2x500m ☞ = 2

**069804** Duopack Terra - 2x500m ☞ = 2

**069293** Duopack White - 2x200m ☞ = 2

**069309** Duopack Terra - 2x200m ☞ = 2

**079452** Duopack TurboLine Blue Polywire 2x400m ☞ = 2

**069316** Duopack Vidoflex 9 TurboLine Plus White 2x200m ☞ = 2

**069323** Duopack Vidoflex 9 TurboLine Plus White 2x400m ☞ = 2

**079421** Duopack Vidoflex 9 TurboLine Plus White 2x1000m ☞ = 2

**079445** Duopack TurboLine tape 12,5mm White 2x200m ☞ = 2

**079438** Duopack TurboLine tape 12,5mm White 2x400m ☞ = 2



## The i Series system – the fence that talks to you.

Working together the i Series system provides fence information at a glance and if it detects any faults, it leads you directly to them, saving you hours of searching.

We are extremely proud of our i Series, as they are not only amazingly powerful devices (up to 100 km!), but they are also smart! The i Series gives you maximum control and helps you save time. So how does that work? By adding various accessories, you have direct insight into the status of your fence, however far away in the field. If there is an issue, you receive a signal on the display or on your smartphone. It tells you exactly where to find it. Saving you the search and therefore time. Many people have already discovered the great performance of this device. Will you be the next enthusiast?

Unrivalled performance with a range of no less than 100 km. Developed in response to demand from the market.

p.  
12

The fencing monitor warns when the values for that zone drop below the set values.



p.  
37

Maximum control! Thanks to the separate, waterproof display you can read the status of the fencing and it can be operated up to a distance of 50 m from the energizer.

Maximum control with your smartphone. Insight into the status of your fencing, fault alerts and switching the energizer on/off, wherever you are.

By placing the remote control on the fencing, it becomes clear where the fault is located. The energizer can be switched off using the remote control.

p.  
37



p.  
37





# Checking 100 km of fencing....

## ... takes less time than reading this sentence!

Everyone wants to have power on their entire fence and the security that the animals stay safely behind it. So any owner will check the fencing regularly to see if there are any issues that could result in a lack of power.

### Longer fences

That is relatively simple for a small fence, but what about fencing of 10 km or more? At that point, a daily check of the fencing soon takes up too much time, and is likely to be skipped. The result is a risk of power loss on the fencing and an unsafe situation for the animals. So Gallagher developed a smart solution so that you always know whether there is enough power on every part of the fence, without this taking up any time.

### Visible on external display


By installing fencing monitors, in combination with any i Series energizer, it becomes clear how much power there is in that particular place. That status is shown on the display of the i Series energizers. The more fencing monitors you install, the clearer the picture of your entire fencing.

You no longer need to go out to check your fencing. All you need to do is read the external display of the i Series energizers. Wherever you are!

### Insight at all times

You can also see the status of your fencing on your smartphone. Thanks to the Gallagher smart app, you have real-time knowledge of the status of your fencing. If there is anything wrong, you receive an alert on your phone. You know which part of your fence has an issue and you can intervene quickly. Once on site, the remote control helps you to find the exact location of the problem.

**All in all, complete control over your fencing and massive time savings!**




1 Fence Monitor(s) recognise any significant drop in fence zone or Energizer performance and raise alarms.




2 Alerts are sent to the Energizer Controller, your mobile phone (via optional Dashboard Fence App) and/or optional Alarm System.



3 The Controller and Remote indicate which zone is in fault. The Remote is used to find the fault within the zone.




4 Once the fault is repaired, power is restored to the fence and tested using the Remote.



5 Power to the fence at the fault location is turned off using the Remote, allowing a safe and convenient repair.

Do you want to know how the i Series system works?

Go to [www.gallagher.eu/i-series](http://www.gallagher.eu/i-series) for more information or scan the QR code to watch the clip.





## M5000i

### The new powerhouse on the market

The mega-powerful M5000i is the latest addition to the familiar i Series, which represents ultimate power and absolute control.

The ultimate power is achieved thanks to the integrated Adaptive Control®. This provides continuous voltage on the fencing, any time anywhere, with the lowest possible electricity consumption. Energizers from the i Series burn away vegetation and ensure maximum power is retained at the end of the fencing.

## “WHAT AN ENERGIZER!”



### M5000i

- With a range of up to 100km
- Maximum control!
- Unrivalled performance

379326	M5000i	☼ = 1
507002	Remote controller for i Series	☼ = 1
510002	Fence monitor for i Series	☼ = 1
567006	i Series WiFi Gateway	☼ = 1
567600	SMS controller for i Series	☼ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
M5000i	379326	9000	19	15	8 x 2 m	100	60	26	160



## M2800i and M1800i

### Powerful, smart and technically perfect energizers

With their power, intelligence and technical perfection, the energizers in the i Series are the best in the world! Plus you can always rely on optimum service and installation advice from the Gallagher specialist.



**NEW power adaptor input - Easy to use, weather tight power adaptor input. Simply insert the provided adaptor or battery lead set (shown above), depending on your chosen power source.**

**Compatible with i Series accessories - Fully compatible with i Series remotes, fence monitors, alarm system and the supplied display monitor (shown below).**








**Easily monitor and control fence performance - Mount in a convenient location up to 50 m\* from Energizer for easy access to fence control and performance information.**



### M2800i and M1800i

- With a range of up to 80km
- Maximum control!
- Unrivalled performance

#### PROMOTION

<b>306315</b>	M2800i excl. accessories	 = 1
<b>306308</b>	M2800i incl. accessories	 = 1
<b>304304</b>	M1800i	 = 1
<b>507002</b>	Remote controller for i Series	 = 1
<b>510002</b>	Fence monitor for i Series	 = 1
<b>567006</b>	i Series WiFi Gateway	 = 1
<b>567600</b>	SMS controller for i Series	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
M2800i	<b>306315</b>	7000	21	14	6 × 2 m	80	50	20	120
M1800i	<b>304304</b>	7000	14	10	5 × 2 m	65	40	17	75



## M1400 and M950 ⚡

The M1400 and the M950 are strong mains energizers. These energizers have a built-in lightning conductor and a LED bar on the front that shows the voltage of the fencing. These energizers are among the Special Edition range offered by Gallagher. They stand out because of their quality and power, and are attractively priced. In other words: High power, high quality, low price. The M1400 is suitable for fences of up to 55 km. The M950 is suitable for fences of up to 42 km.



### M1400 and M950

- LED bar with performance display
- Easy to use
- Built-in lightning protection
- Maintenance-free

324319	M1400	⚡ = 1
324302	M950	⚡ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
M1400	<b>324319</b>	7700	12	7,7	4 × 2 m	55	34	14	56
M950	<b>324302</b>	7700	9	6,1	4 × 2 m	42	31	11	38



## M650, M550 and M350 ⚡

A mains energizer with a fantastic price/quality ratio. The M650, M550 and M350 are simple to install and easy to use. The M350 is suitable for fences of up to 28 km, the M550 up to 35 km and the M650 can power fences up to 40 km. These energizers are also among the Special Edition range offered by Gallagher.



### M650, M550 and M350

- Easy to use
- Built-in lightning protection
- Maintenance-free

323329	M650	⚡ = 1
323312	M550	⚡ = 1
323305	M350	⚡ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
M650	323329	9200	6,50	4,5	3 × 2 m	40	28	10	26
M550	323312	9200	5,50	3,9	3 × 2 m	35	25	9	22
M350	323305	8700	3,50	2,7	3 × 2 m	28	12	7	14




## M160, M120, M50 and M35

Mains energizers are extremely suitable for permanent fencing. The M160 and M120 are particularly suitable for larger gardens or small paddocks, up to a maximum of 9 km. The M50 and the M35 are ideal for keeping pets in small gardens (1 km) or for keeping out undesirable animals (such as stone martens and cranes) from your garden. The M160 is suitable for fencing up to 9 km, the M120 for fencing up to 8 km, the M50 up to a maximum of 4 km and the M35 is suitable up to a length of maximum 4 km.



### M160, M120, M50 and M35

- Easy to use
- Built-in lightning protection
- Maintenance-free

384306	M160	 = 1
033333	M120	 = 1
038332	M50	 = 1
383361	M35	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
M160	384306	7700	1,60	0,60	2 × 1 m	9,0	3,5	1,8	6
M120	033333	7000	1,20	0,65	2 × 1 m	8,0	3,0	1,2	4
M50	038332	6200	0,50	0,30	1 × 1 m	4,0	2,0	1,0	2
M35	383361	5400	0,35	0,23	1 × 0,5 m	2,0	1,0	0,5	1



## MBS2800i and MBS1800i

Farm anywhere with market leading efficiency and the flexibility of mains, battery or solar. The Multi Powered i Series Fence Energizers allows for quick and easy monitoring of fence performance, informing you of any problems immediately so action can be taken quickly.

Reliable, adaptive i Series technology - The proven Gallagher i Series technology provides complete confidence in continued fence performance irrespective of changes in power supply, temperatures and fence conditions.

Easily monitor and control fence performance



Compatible with i Series accessories - Fully compatible with i Series remotes, fence monitors, alarm system and the supplied display monitor (shown below).



Designed for permanent installation where reliable mains power is available. Mains leadset supplied with product.









To ensure you never lose power on your fence, connect between the mains power supply and the Energizer and connect to your 12V battery as a back-up power source. Sold separately. Designed for reliable power, all



year round where mains power is unavailable or unreliable.

### MBS2800i and MBS1800i

- 12 V device can also be used on the power line
- With a range of no less than 80 km.
- Maximum control!
- Unrivalled performance

315331	MBS2800i	 = 1
315317	MBS1800i	 = 1
083053	Solar Powerstation MBS2800i	 = 1
083060	Solar Powerstation MBS1800i	 = 1
582108	12V Battery Backup system	 = 1
401324	For MBSi series Energizers	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
MBS2800i	315331	7000	21	14	6 × 2 m	80	50	20	120
MBS1800i	315317	7000	14	10	5 × 2 m	65	40	17	75



## MBS800, MBS400 and MBS200

Strong 12 V energizers that can also be connected to the mains or powered by solar panels. The extremely sturdy housing of these devices is resistant to frequent transport that is part and parcel of using a portable energizer. This MBS series has a Battery Management System, the device automatically adjusts to the energy level of the battery. If it is low, the pulse slows down too. All MBS energizers are supplied with a power feed adapter in order to be able to connect the energizers to the mains network (230 V). The connecting cable required to connect the device to the fence is also supplied standard.

Use any power source -  
Designed for mains, battery or  
solar installations up to 40km

Superior  
performance  
in all oper-  
ating modes  
- Reliable fence  
voltage irre-  
spective of your  
power source

Protect your battery -  
Smart battery man-  
agement algorithm protects  
the battery from being  
over discharged and  
permanently damaged

View fence performance  
at a glance - LED bar  
graph indicates fence  
voltage performance



### MBS800, MBS400 and MBS200

- Fast, flexible installation
- Portable, water resistance case
- Built in lightning protection
- Including mains adapter
- Including connection cable set

<b>390314</b>	MBS800	☼ = 1
<b>390307</b>	MBS400	☼ = 1
<b>389318</b>	MBS200	☼ = 1
<b>495415</b>	40W Solarpanel + Bracket	☼ = 1
<b>495217</b>	20W Solarpanel + Bracket	☼ = 1
<b>582108</b>	12V Battery Backup system	☼ = 1
<b>401324</b>	For MBSi series Energizers	☼ = 1
<b>083077</b>	Solar Powerstation MBS800	☼ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
MBS800	<b>390314</b>	9200	7,5	4,9	4 × 2 m	40	29	10	32
MBS400	<b>390307</b>	9100	4,0	3,0	4 × 1 m	30	19	8	16
MBS200	<b>389318</b>	9000	2,0	1,5	4 × 1 m	20	13	5	8



## MB300 and MB150

The MB300 and MB150 are multi-power energizers suitable for longer fences of up to 25 km and 15 km, respectively. These energizers work on 230 V and with a 12 V battery. The design means the energizer is easy to move and it can be mounted in various ways. The energizer is supplied with a set of cables. The MB300 and MB150 are energizers in the Special Edition Range; powerful devices for an attractive price.



### MB300 and MB150

- Dual Power: 230 V plug in or battery power
- Superior fence performance
- Reliable animal control is assured with built in lightning control
- Mains power supply sold separately
- Battery not included

<b>388328</b>	MB300	☼ = 1
<b>388311</b>	MB150	☼ = 1
<b>582108</b>	12V Battery Backup system	☼ = 1
<b>401218</b>	PowerSupply 230V/15V MB/MBS	☼ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
MB300	<b>388328</b>	9100	2,70	2,00	4 × 1 m	25,0	16,0	6,0	12
MB150	<b>388311</b>	8600	1,50	1,20	3 × 1 m	15,0	10,0	4,0	6



## B300, B200 and B100 12V

For strip grazing, temporary fencing or setting up electric fencing where there is unreliable or no mains power, a Battery Energizer System is a good choice

Quick glance indicator lights show battery and fence performance.

Flexible fence management - choose from full or half power mode to extend battery life.

Carry handle for easy transportation.

Versatile animal control - vary Energizer pulse modes to suit different animals.

Easy battery installation with simple clip lock case.



### B300, B200 and B100

- 12 V energizer, battery fits in the case
- For fences up to max. 30 km
- Carry handle for easy transportation
- Battery not included

<b>394008</b>	B300	 = 1
<b>393001</b>	B200	 = 1
<b>392004</b>	B100	 = 1
<b>068586</b>	B200+6W solar assist	 = 1
<b>068709</b>	Bracket for B100/B200/B300	 = 1
<b>068609</b>	6W assist kit	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
B300	<b>394008</b>	10000	2,60	2,00	4 × 1 m	30,0	10,0	8,0	15
B200	<b>393001</b>	9000	1,50	1,10	3 × 1 m	20,0	7,0	5,0	10
B100	<b>392004</b>	10000	0,80	0,55	2 × 1 m	10,0	5,0	3,0	4



## S230 and S220

Combination set of a B200 energizer, solar panel, bracket and an Optima accumulator. The perfect, reliable combination for problem-free provision of power to your fence for many years. Maintenance free. Ideal for sunny regions and for fences up to 20 km. Contents of S230 and S220:



**S230:** B200 energiser, 30 W solar panel, bracket, and 3.7 L Optima battery

**S220:** B200 energiser, 20 W solar panel, bracket, and 2.7 L Optima battery

- Total solution for a mobile fence
- Battery unit on solar
- Convenience for you!

**060870** S230 (B200+30W+Optima 3,7l)  = 1

**061556** S220 (B200+20W+Optima 2,7l)  = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
S230	<b>060870</b>	9000	1,50	1,10	3 × 1 m	20,0	7,0	5,0	10
S220	<b>061556</b>	9000	1,50	1,10	3 × 1 m	20,0	7,0	5,0	10



## BA80 and BA40

Gallagher has revised its 9 V devices. They are all powerful battery devices that are simple to operate, and with a sturdy housing of the quality you've come to expect from Gallagher. The BA80 and the BA40 have a black housing with orange cover. These devices have an energy-saving setting. By using the energy-saving setting, you extend the life of the battery because the device gives slower pulses. The control lamp on the energizer shows the pulse of the battery. The BA80 and BA40 are suitable for larger (mobile) fences. The energizers are supplied with a set of connectors. Excluding battery.

**Market-leading 9 Volt Power**  
Connects to 9 Volt battery to power up to 10 km

**Sustainable battery use.**  
The BA80 and BA40 has one extra setting to alternate between full pulse and reduced pulse. That means the battery lasts longer.

**Know your energizer's working**  
Green LED flashes with every fence pulse



**Gallagher reliability.**  
Extensive testing and industry leading manufacturing processes



**Designed for the outdoors**  
Water resistant case with built-in lightning protection

### BA80 and BA40

- Simple to connect, all lead sets included
- With lightning protection
- Robust housing
- Easy to operate
- Additional setting to alternate pulse to extend battery life
- Including connection kit
- Excluding battery

**356358** BA80 = 1

**356327** BA40 = 1

**063451** 9V/210Ah - 190x125x160mm = 1

**065073** 9V/175Ah - 190x125x160mm = 2

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
BA80	<b>356358</b>	9400	0,8	0,48	1 × 1 m	10,0	5,0	3,0	4
BA40	<b>356327</b>	9400	0,4	0,26	1 × 1 m	6,0	3,0	1,5	2



## BA30 and BA20

The BA30 and BA20 are strong and easy-to-operate 9 V energizers. Suitable for smaller fences. The energizers have a robust housing and are easy to operate. The BA30 and BA20 have a completely black housing and an indicator lamp to warn you when the battery is nearly empty. The energizers are supplied with a set of connector cables. The battery is not included.



### BA30 and BA20

- Simple to connect, all lead sets included
- With lightning protection
- Robust housing
- Easy to operate
- Including connection kit
- Excluding battery

<b>356303</b>	BA30	 = 1
<b>356310</b>	BA20	 = 1
<b>7608</b>	Earth Stake Stand for BA	 = 1
<b>065073</b>	9V/175Ah - 190x125x160mm	 = 2

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
BA30	<b>356303</b>	9600	0,25	0,19	1 × 0,5 m	4,0	3,0	0,75	1
BA20	<b>356310</b>	9600	0,17	0,12	1 × 0,5 m	2,0	1,5	0,5	0,8



## B60

The B60 is the no-nonsense entry model of the 12 Volt accumulator energizers. This is a small device, easily portable and suitable for fencing of up to approximately 6 km.



### B60

- Compact and portable design
- Fence indicator flashes with each energizer pulse
- Use with a 12 Volt deep cycle battery
- Battery not included

<b>388304</b>	B60 - 12V/0,6J	 = 1
<b>004171</b>	12V/85Ah LA - 278x175x190mm	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
B60	<b>388304</b>	8500	0,60	0,40	1 × 1 m	8,0	2,0	1,0	3



## B11 and B10 9V 12V

The B11 is an extremely handy battery device, with adjustable battery saving options. This energizer is easy to fit and to connect up. Extremely suitable for multiple wire fences up to 1 km The B11 is supplied with a 12 V accumulator connector cable and 6 × 1.5 V battery set.

The B10 is an extremely compact battery-powered energizer for very short fences (< 1 km). This device works on 6 × 1.5 V Alkaline D cell (LR20) batteries (not included). The B10 also works on a 12 V accumulator, B110/12 V adapter kit.



### B11 and B10

- Compact devices
- Easy to connect
- Can also be connected to 12V battery

013534	B11	☞ = 1
003634	B10 - excl. 6x1,5V	☞ = 1
004747	12V Battery connection kit for B10 (1)	☞ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
B10	003634	7900	0,10	0,07	1 × 0,5 m	1,0	0,5	0,5	0,5
B11	013534	8200	0,11	0,09	1 × 0,5 m	1,0	0,5	0,5	0,5



## S400 and S200

The S400 and the S200 are the strongest devices in the Gallagher solar range. These energizers have a powerful solar panel and are fitted with the Battery Management System, ensuring that the energizer automatically adjusts to the battery's power level. If the energy in the battery decreases, the pulse adjusts to have current on the fencing for as long as possible. The S400 and S200 are supplied with batteries included and a stand (50 cm), that is also suitable for use as an extra earthing rod.

**Battery Status Indicator**  
- LED light shows battery health in an instant.

**Water resistant case, with built in lightning protection**







 **S200**

 **S400**

### S400 and S200

- Multiple power options, the customer has full control, with multiple operation modes to suit wildlife animal exclusion and livestock animal inclusion.
- Portable and quick to install, easily set up in any location and moved about as required allowing it to be used for strip grazing and better pasture management.

<b>361307</b>	S400 incl. batteries	 = 1
<b>360300</b>	S200 incl. batteries	 = 1
<b>007509</b>	Stand for S range Solar Energizers, length 90cm	 = 1
<b>033931</b>	12V 7,2Ah Battery S100, S200, S400	 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)	Solar panel Watt
S400	<b>361307</b>	9600	4,0	3,1	4 × 1 m	30	16	7	16	40
S200	<b>360300</b>	9600	2,0	1,5	2 × 1 m	20	10	5	8	20



## S100 and S40 ☀

The S100 and the S40 are easy-to-install solar energizers that are also very portable. No more hassle with empty batteries, even after 3 weeks without sunshine or power. These energizers have built-in lightning protection, and are supplied with batteries included.

**The S100** is suitable for fences of up to 10 km and is fitted with the unique Battery Management System (the device is automatically adjusted to the power level of the battery).

**The S40** is suitable for fences of up to 5 km.



### S100 and S40

- Multiple power options - two operating modes ensure optimum battery usage, even in periods of low sunlight:
- Fully integrated, ready to use - includes fence/earth leadset, rechargeable 12v battery, solar panel and mains rechargeable power kit.

<b>346304</b>	S100 incl. battery	☀ = 1
<b>345307</b>	S40 incl. battery	☀ = 1
<b>033931</b>	12V 7,2Ah Battery S100, S200, S400	☀ = 1
<b>000459</b>	6V 10Ah Battery S40	☀ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)	Solar panel Watt
S100	<b>346304</b>	9600	1,0	0,74	2 × 1 m	10	5	3	4	7
S40	<b>345307</b>	7800	0,40	0,29	1 × 1 m	5	3	1,5	2	4



## S20, S16 and S10

Your fencing is less than 3 km long? That makes the S20, S16 or S10 extremely suitable. These devices are quick and easy to install, easily portable and tough enough to withstand a fall. They are supplied with a battery included. The S20, S16 and S10 can also be easily attached to the Gallagher Ring Top post by means of a separately available stand support (art. 571102). Or opt for a separately available 50 cm stand (art. 730003) or 90 cm version (art. 007509). The stands can also be used as an extra earthing rod.

**Farm-proof**  
Despite the low weight of this energizer, it is sturdy, maintenance free, and the magnetic button prevents water from entering the energizer via that route.

**Light and practical**  
The energizer is easy to move and easy to install in various ways.

**Battery**  
All the energizers in the solar range are supplied with a chargeable battery.



### S20, S16 and S10

**S20: < 3 km, S16: < 1,5 km, S10: < 1 km**

- Operates in sunlight and daylight
- Quick and easy to install
- Ideal smaller (mobile) gates

**PROMOTION**

<b>341323</b>	S20 incl. battery and mount	☼ = 1
<b>341316</b>	S16 incl. battery	☼ = 1
<b>341309</b>	S10 incl. battery	☼ = 1
<b>007509</b>	Stand for S range Solar Energizers, length 90cm	☼ = 1
<b>571102</b>	Mount Solar post S10, S16, S20	☼ = 1
<b>075188</b>	6V 4Ah Battery S10, S16, S20	☼ = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum impulse energy (J)	Zonnepaneel (Watt)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
S20	<b>341323</b>	6900	0.20	0.14	1,5	1 × 1 m	3	1,5	1	1,2
S16	<b>341316</b>	6900	0.16	0.13	1,5	1 × 0,5 m	1,5	0,8	0,5	0,8
S10	<b>341309</b>	7000	0.10	0.08	1,5	1 × 0,5 m	1	0,5	0,3	0,5



## S12 and S6

**S12:** A compact, portable and super reliable energizer that is designed on the basis of real, practical needs. An internal lithium battery, smart electronics and a robust construction come together for unrivalled performances. With built-in earthing and advanced solar technology, Gallagher has taken portable solar-powered energizers to a new level.



**S6:** The S6 has been developed for private users. For example, to keep cats out of the garden or herons from the pond. The S6 is extremely suitable for the campsite or the garden as an energizer on a temporary fence, to keep pets near, or unwanted animals away.



### S12 and S6

**S12: < 1,5 km, S6: < 0,5 km**

- small and powerful
- suitable for fencing of up to 1,5 km
- to keep pets and other animals out
- protect your pets and/or your garden

<b>349015</b>	S12 incl. Lithium battery	 = 1
<b>349008</b>	S6 incl. Lithium battery	 = 1

**Available: May 2021**

Item		Maximum output voltage (V)	Charging energy (J)	Maximum impulse energy (J)	Zonnepaneel (Watt)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
S12	<b>349015</b>	9200	0,12	0,08	2,2W	1x0,5m	1,5	0,7	0,4	0,75/1,5
S6	<b>349008</b>	7500	0,08	0,06	2,2W	1x0,5m	0,5	0,2	0,1	0,1/0,25



## Solar box MBS2800i, MBS1800i and MBS800

This solar station is plug and play. The energizer, the batteries, solar panel, earthing mix and earth pegs are all included. The only thing you need to do is ram the supplied earth pegs into the ground and connect the energizer. Simple, quick and time saving! This solar station can be expanded with all the accessories for the i Series energizers for even more control and convenience. With this set, you have everything you need for fencing conveniently together.



### Solarbox MBS2800i, MBS1800i and MBS800

- MBS2800i / MBS1800i + external display
- 4 gel batteries (MBS2800i), 2 gel batteries (MBS1800i, MBS800)
- 270 Watt solar module (mounted on the cabinet)
- Bentonite earthing included
- Included earth stakes

**083053** Solar Powerstation MBS2800i = 1

**083060** Solar Powerstation MBS1800i = 1

**083077** Solar Powerstation MBS800 = 1

Item		Maximum output voltage (V)	Charging energy (J)	Maximum Impulse energy (J)	Number of earthing rods required	No vegetation (km) (recommended)	Light vegetation (km) (recommended)	Dense vegetation (km) (recommended)	Fence surface (ha) (recommended)
MBS2800i	<b>315331</b>	7000	21	14	6 × 2 m	80	50	20	120
MBS1800i	<b>315317</b>	7000	14	10	5 × 2 m	65	40	17	75
MBS800	<b>083077</b>	9200	7,5	4,9	4 x 2m	40	29	10	32/80



To power a 9V or 12V energizer, you need a Gallagher battery. A Gallagher 12V energizer and an Optima 12V battery are the ultimate combination! The Optima battery is the most environmentally-friendly solution, because of its durability.



## 12V Battery

12v

A maintenance-free, 12V battery that provides reliable and consistent power.

This long life battery can be used as a power supply for 9V devices.



033409	12V/105Ah LA - 353x175x190mm	☞ = 1
004171	12V/85Ah LA - 278x175x190mm	☞ = 1
033515	12V/65Ah - 242x175x190mm	☞ = 1

## 12V SLA Battery

12v

Maintenance free batteries. Suited for powering battery energizers. The 25Ah is a sealed lead/acid battery. Fits into the case of our 9Volt energizers when using a solar panel.



033553	12V/25Ah - 166x175x125mm	☞ = 1
033931	12V 7,2Ah Battery S100, S200, S400	☞ = 1

## 12V Optima Yellowtop

12v

Uncompromising Quality! This Optima S5,5L 12V battery can be compared with a regular 105Ah 12V battery, but is smaller in size, lighter in weight and has a longer life. Ideal for use with solar modules. Extremely fast recharge with all common, regulated chargers. Volume 5,5 litres, dimensions L325xH238xW165mm.

062096	12V/S5,5L - 325x238x165mm	☞ = 1
059614	12V/R3,7L - 237x197x171mm	☞ = 1
059621	12V/S2,7L - 237x227x129mm	☞ = 1





9V Powerpack Alkaline battery

9v

Environmentally friendly alkaline 9V battery for use with 9V battery powered energizers. Alkaline Batteries give you up to 30% better performance than Air Oxygen batteries. Suitable for all Gallagher 9V energizers.

065073	9V/175Ah - 190x125x160mm	🔌 = 2
063451	Powerpack Alkaline battery 9V/210Ah - 190x125x160mm	🔌 = 1
048588	Powerpack Alkaline battery 9V/175Ah - 190x125x160mm	🔌 = 1
008711	Powerpack Alkaline battery 9V/160Ah - 190x125x160mm	🔌 = 1
008704	Powerpack Alkaline battery 9V/120Ah - 160x110x115mm	🔌 = 1
007578	Powerpack Alkaline battery 9V/55Ah - 160x110x115mm	🔌 = 1



6V Round Alkaline battery

6v

Environmentally friendly alkaline 6 Volt battery 90 Ah for use with battery powered energizers.



055661	6V/90Ah - 180x180x170mm	🔌 = 1
--------	-------------------------	-------

6V 10Ah Battery S40

6v



000459	6V 10Ah Battery S40	🔌 = 1
075188	6V 4Ah Battery S10, S16, S20	🔌 = 1

Battery for FoxlightS

6v

Spare battery for the Fox light



002169	6V Battery for FoxlightS	🔌 = 1
061716	FoxlightS	🔌 = 1

Battery Charger CTEK

12v 5

Most batteries loose charge during winter time. Prevent this by connecting your battery to this maintenance charger. Your battery will remain charged! Essential for your battery during winter time. This charger is capable to charge all batteries up to 105Ah.



056707	12V XS 0,8 EU	🔌 = 1
567299	6V XC 0,8 EU	🔌 = 1





Solar panels in combination with battery energizers extend the lifespan of your battery

- Gallagher provides top-quality, tested solar panels with a 2-year warranty on all modules.
- Solar power is environmentally friendly and an increasingly popular economical energy provider.
- All solar panels have a controller that protects the battery against overcharging.
- The range is completed with galvanised brackets, bolts and clamps.
- All solar panels have polycrystalline cells for maximum energy yield.
- Solar panels can be used with mains energizers if you use a converter (item no 069392).



## Solar panel

12v 2

Polycrystalline high-performance solar module with optimised low-light and temperature features. With sealed high-performance load regulator. Shock-resistant and hardened solar glass with self-cleaning surface and sturdy aluminium frame. Complete with power cable. Very easy fitting. More than 20 year service life.

<b>041718</b>	60 Watt incl. 10A regulator	☞ = 1
<b>027897</b>	Solar panel 50W incl. 10A regulator	☞ = 1
<b>041725</b>	Solar panel 30W incl. 10A regulator	☞ = 1
<b>041732</b>	Solar panel 20W incl. 2A regulator	☞ = 1
<b>041701</b>	Solar panel 10W incl. 2A regulator	☞ = 1



## Solar panel regulator

12v 2

10A Regulator for 30W, 50W and 60Watt Solarpanel.  
Comes included with 3m cable, female cable terminals and Alligator clips.



<b>068845</b>	10A Regulator for >30W Solar panels	☞ = 1
<b>068838</b>	Regulator 2A for 10/20W Solar panel	☞ = 1

## Solar panel bracket

2

To mount the panel on the wall, post or on the anti-theft box.



<b>069781</b>	Bracket for 50/60W Solar panel	☞ = 1
<b>069774</b>	Solar bracket 10/20/30W Solar panel	☞ = 1

## Solar panel bracket

2

Bracket for mounting a 10W, 20W or 30W GE Solarpanel to a B100, B200 or B300 Energizer.



<b>068709</b>	Bracket for B100/B200/B300	☞ = 1
---------------	----------------------------	-------



Earthing ensures that the current can flow back to the energizer as soon as an animal touches the fence. No earthing means no current on the fencing, which is essential to good fencing!



## Earth stake



Without a proper Earth System your energizer will not perform. Always use galvanised earth stakes. Battery Energizers: Earth Stake length 1m c/w clamp.



<b>029037</b>	2m with earth clamp	= 3
<b>084487</b>	1,7m with earth clamp	= 1
<b>029020</b>	1m with earth clamp	= 3
<b>008735</b>	1m without earth clamp	= 1

## Bentonite

Earthing can be achieved simply and quickly with this mix, even in extremely dry conditions. The mixture of salt and absorbent clay retains moisture and increases the conductivity of the surrounding soil. To be used in poor earthing conditions and in combination with more powerful energizers. Excl. earth stake.



<b>008773</b>	Super earthing mix (6kg)	= 1
---------------	--------------------------	-----

## Earthing accessories



Earth socket for earth peg. Ideal to connect two pegs in bad earthing conditions.



<b>044023</b>	Earth socket	= 1
<b>044030</b>	Earth clamp	= 1

## Earth stake 0,5m



Without a proper Earth System your energizer will not perform. Always use galvanised earth stakes. To improve the earthing of Dry-cell battery-units use the 0,5m stake (c/w 3m of cable). The 1 meter earth stake is ideal for earthing 12V energizers. C/W clamp.



<b>031023</b>	Earth stake 0,5m with 3m cable	= 1
---------------	--------------------------------	-----



## Lead out cable XL Red

10

This earth cable has heavy-duty double insulation for optimum protection. The earth cable is suitable for underground current conduction. The aluminium-coated core has a high tensile strength and its conductivity is 4x better than that of a standard earth cable

<b>627922</b>	Red 2,5mm 50m	 = 1
<b>016276</b>	Lead out cable 2,5mm XL High Conductive 200m 8,4 Ohm/km	 = 1



## Lead out cable

Double insulated lead-out cable with meter marking to connect the energiser with the fence and to make (underground) connections (e.g. gateways). The core of 2.5mm galvanised wire makes this cable also suitable for distances longer than 30m.

<b>162713</b>	2,5mm - 400m - 35 Ohm/km	 = 1
<b>021611</b>	2,5mm 100m 35 Ohm/km	 = 1
<b>062712</b>	2,5mm 50m 35 Ohm/km	 = 1
<b>065011</b>	2,5mm 25m 35 Ohm/km	 = 1
<b>021604</b>	1,6mm 50m 100 Ohm/km	 = 1
<b>066097</b>	1,6mm 25m 100 Ohm/km	 = 1
<b>065028</b>	1,6mm 10m 100 Ohm/km	 = 1



## Earthing accessories

2

Excellent connections between different lead-out cables are essential to prevent power loss. This harsh environment connector for lead-out cables up to 2,5mm offers a secure, waterproof connection and is easy to install.



<b>063796</b>	Lead-out connector	 = 2
---------------	--------------------	---





## Vandal proof box



A galvanised box that protects battery and fence units. To deter vandals, the box is connected to the energizer. Outside box dimensions 412x270x565mm (LxWxH).



**083046** Electrified Vandal Proof Box

 = 1

## Gallagher Solarbox



Portable box for energiser, battery and solar panel.

Suitable for:

Max. size of energiser:

380x110x300mm (lxwxh).

Max. size of battery:

330x175x240mm (lxwxh).

Gallagher solar panel 10W, 20W and 30Watt.



**073511** Gallagher Solarbox

 = 1

**077328** Solarbox bracket for 50/60W Solar panel

 = 1







## i Series Remote Controller



- Energizer controller: Shows all your fence performance information in one convenient separate display box that can be placed up to 50m away from the energizer itself.

507002 Remote controller for i Series = 1



## i Series Fence Monitor



Allows you to monitor a separate section of your fence. The Fence Monitor communicates through the fence line with the energizer.

510002 Fence monitor for i Series = 1



## i Series WiFi Gateway



Fence performance in your pocket! Connect the i Series WiFi Gateway to your existing Gallagher i Series Energizer, install the Dashboard - Fence app on your phone and get real time fence information. The WiFi Module will connect to the port on the back of the i Series Energizer. The controller is then connected directly to the WiFi Gateway.

567006 i Series WiFi Gateway = 1





i Series SMS Controller



This SMS controller for the I-series warns you via a text message when the fence voltage gets below a preset alarm level. In addition, the controller sends updates to your mobile phone.



567600	SMS controller for i Series	= 1
--------	-----------------------------	-----

i Series Automatic Transfer Switch



The Automatic Transfer Switch US-12N provides a faultless switch from mains to battery/inverter voltage in an i-Series configuration.



400336	For i Series backup systems	= 1
--------	-----------------------------	-----

i Series Alarm System



Monitor a section of fence and drive external strobe lights, sirens or alarm panels. The Alarm System provides an alarm on the Energizer Controller, Remote or your phone (via the separately available I-series SMS Controller), should an electric gate be opened or wire cut. Connects to the energizer by wired connection.



579009	Alarm System for i Series	= 1
005215	Siren	= 1
005208	Flashlight	= 1

MB series 12V Battery Backup system



The Gallagher battery back-up provides an automatic battery supply when there is no mains supply to the energizer. The back-up is easy to install and compatible with all MB i Series and MB/MBS energisers.



582108	12V Battery Backup system	= 1
--------	---------------------------	-----





## SMS fence alarm



The SMS fence alarm is a unique plug & play security for your fence. Compared with the existing devices this product is in another league. The SMS Fence alarm warns you via SMS if the voltage is too low.



055654 SMS fence alarm

☞ = 1

## SMS remote control (GSM)



With the (GSM) SMS remote controller you can switch all mains energizers on and off by calling or texting with your mobile phone. So if you detect a fence failure, you can instantly repair your fence without getting a shock. Even in case of sudden power failure, the system will send a text message.



557063 With Power failure notification

☞ = 1

## Cut out switch



By using a switch, you can divide your fence into several sections and switch them on and off independently of each other. This will also help you trace any faults that occur.



060705 Cut out switch

☞ = 1

## Knife Cut-Off Switch



This switch helps you to switch off a part of the fencing for maintenance, for use for passages and gates or when you are looking for faults. The switch also offers the option to divide the fence into different plots. It can also be used to switch the fence on or off on the spot.

The switch is made of stainless steel, visible from a distance, and is supplied with fitting screws.



000770 Knife Cut-Off Switch

☞ = 1

## Lightning diverter



The only adjustable lightning diverter on the market, suitable for every energizer. Protects the energizer against damage through lightning by diverting the lightning from the fence to ground (earth). The lightning diverter needs to be mounted between the fence and the energizer. Can withstand multiple lightning strikes.



064802 Lightning diverter

☞ = 1

## Flood gate controller



Device especially for ditches that can be mounted on a fence. It stops the current flowing through the bottom line if the water (or another resistance) reaches the bottom wire. The rest of the wires will keep its voltage. Has a resistance of 5600 Ohm.



1506 Controller 5600 Ohm

☞ = 1

## Crocodile clip



400204 Crocodile clip red (5)

☞ = 5

400211 Crocodile clip green (5)

☞ = 5



Fence and Earth connection lead

004938		Fence and Earth connection lead for 9V/12V Energizers (1)	⚡ = 1
201276		Fence and Earth connection lead for 9V/12V Energizers (1)	⚡ = 1
005499		12V Battery connection lead for 9V Energizers (1)	⚡ = 1
004747		12V Battery connection kit for B10 (1)	⚡ = 1
201283		12V Battery connection lead for 9V/12V Energizers (1)	⚡ = 1
582207		12V Battery Lead set MB/MBS Series (1)	⚡ = 1
401324		PowerSupply 230V/15V MBSi	⚡ = 1
401218		PowerSupply 230V/15V MB/MBS	⚡ = 1

9V				12V				Multi Power				Solar		
B10	B20 B35	B40 B50	BA80 BA40 BA30 BA20	B60 (2020)	B80 B180 B280	B100 B200 B300	MB150 MB300	MBS200 MBS400 MBS800	MB1000 MBS1800i MBS2800i	S10 S16 S17 S20 S22 S40 S50	S100 S200 S400	S220 S230		
	•		•	•				•	•	•	•	•		
		•			•	•								•
	•		•											
•														
		•				•								•
								•	•	•				
					•			•	•	•				
					•			•	•					

Aluminum warning sign

This aluminium warning sign is made of anodised aluminium. The text on the sign is particularly clear to read and it is resistant to the elements. As this warning sign is electrified too, it is unlikely to be stolen.



082216 Aluminum warning sign EU ⚡ = 1

EU Warning sign

Warning signs must be attached to any electric fence every 50 metres wherever the fence borders a public right of way.



075881 Universal Warning sign ⚡ = 1





Would you like to prevent your animals from escaping as result of a lack of current? Would you like to know what caused the short-circuit in your fencing? Do you want to protect your energizer against a lightning strike? You can with our range of protectors and testers!

## Fault Finder



Pinpoints faults quickly and easily whatever type of wire or energizer is used. By simultaneously measuring the current flow and voltage, the Fault Finder will follow the current flow to any one of a series of faults.



509051	Fault Finder	⚡ = 1
202068	Battery Fault Finder	⚡ = 1

## Fence Volt Meter



Supplies exact information on the condition of your fence. Makes targeted trouble shooting very easy. Auto ON/OFF. Helpful tool for checking earthing system. Powered by one 9V battery (a life of 6-12 months). Displays fence voltage from 100V up to 12kV.



015033	Fence Voltmeter	⚡ = 1
--------	-----------------	-------

## Neontester



A convenient tool for checking whether there is sufficient voltage at the electric fence. Not suitable for checking earth systems.

**Range:** Led 1, 1,0kV > 1,8kV, Led 2, 1,9kV > 2,5kV, Led 3, 2,6kV > 3,8kV, Led 4, 3,9kV > 4,8kV, Led 5, 4,9kV >



015019	Neontester	⚡ = 1
--------	------------	-------

## Live fence indicator



The Live fence indicator is fitted to the fence and flashes with each pulse of the energizer so you can see whether the fencing is still working correctly.



511009	Live fence indicator	⚡ = 1
--------	----------------------	-------

## Electric fence Keyring Beeper

A very handy and simple tester which can be attached to a key ring. Hold it close to an electric fence and it will give a loud beep if the fence is active.



079667	Keyring Beeper	⚡ = 1
--------	----------------	-------

## i Series Remote Controller



▪ Energizer controller: Shows all your fence performance information in one convenient separate display box that can be placed up to 50m away from the energizer itself.




507002	Remote controller for i Series	⚡ = 1
--------	--------------------------------	-------



Gallagher has two types of posts - posts for temporary fencing and posts for permanent fencing. The permanent posts - Gallagher post, Ecopost and Insultimber post - differ from each other in terms of quality, sustainability and price. We also have portable posts in various types and sizes, including plastic posts, fibre-glass posts and metal posts. Each type has its own application.



### Insultimber (FSC®)



Self-insulated Timber (FSC®) for permanent fencing. Up to 70% more cost effective than traditional non-electric fencing. No insulators required. Insultimber (FSC®) does not require chemical treatment.

017904	Strainer post 250x10x10cm (1)	☞ = 1
017898	Insultimber (FSC®) Strainer post 200x8x8cm (1)	☞ = 1
017997	Insultimber (FSC®) Strut 200x4x8cm (1)	☞ = 1
007847	Insultimber (FSC®) Post 210x5x5cm (1)	☞ = 1
007724	Insultimber (FSC®) Post 180x3,8x3,8cm (1)	☞ = 1
007601	Insultimber (FSC®) Post 150x3,8x3,8cm (1)	☞ = 1
007733	Insultimber (FSC®) Dropper 126x3,8x2,6cm (1)	☞ = 1
019403	Insultimber (FSC®) Dropper 110x3,8x2,6cm (1)	☞ = 1
007618	Insultimber (FSC®) Dropper 95x3,8x2,6cm (1)	☞ = 1
035311	Rammer Insultimber post	☞ = 1



The mark of responsible forestry

FSC products available on request

017614	Sledge hammer	☞ = 1
704668	Post holer 100mm	☞ = 1
704644	Post holer 75mm	☞ = 1
024704	Clips long for Insultimber/Ecopost (1000)	☞ = 1000
011063	Clips long for Insultimber/Ecopost (50)	☞ = 50
024698	Clips short for Insultimber/Ecopost (1000)	☞ = 1000
011056	Clips short for Insultimber/Ecopost (25)	☞ = 25








# A portable post for any situation!

## Light and easy to move

Gallagher also has portable posts in various types and sizes, including plastic posts, fibreglass posts and metal posts. They are all light-weight and easy to move. For example, we have plastic posts with wire holders so you do not need any loose insulators. The tread-in post has been developed specifically for portable horse fencing. You can take 50 of these smoothly finished posts in one hand when you fence off your pasture. You already know the spring steel post with pigtail insulator.

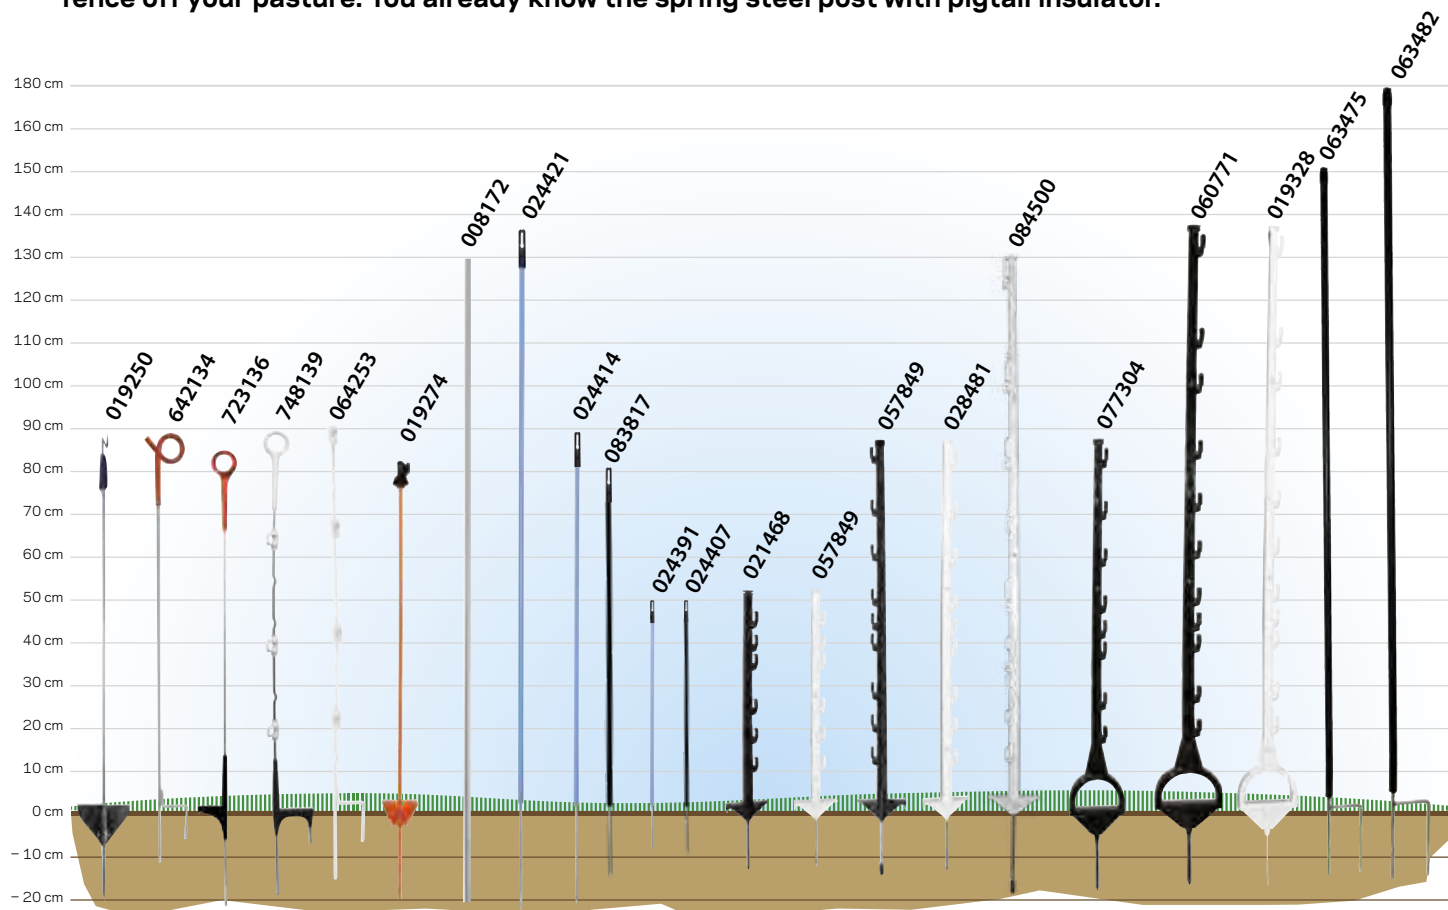

## Multi Wire Ring Top Post



With several movable insulators, making it easy to put up fencing at the required height. Extremely suitable for fencing pastures with animals of different heights. The post has a patented top insulator that prevents the wire from wearing through.



748139 White 1,10m (10)

⌘ = 10



[www.gallagher.eu](http://www.gallagher.eu)




## Plastic Wolf post 1,50m, white (10)



White plastic post with a total length of 1.55 m, with a maximum fencing height of 1.30 m. This post has 14 offsets that enable you to adjust the wire height and the number of wires to your needs. Suitable for plastic wire, cord and tape of up to 40 mm. Twist & lock system guarantees simple fixing.

**084500** Plastic Wolf post 1,50m, white (10) ☞ = 10

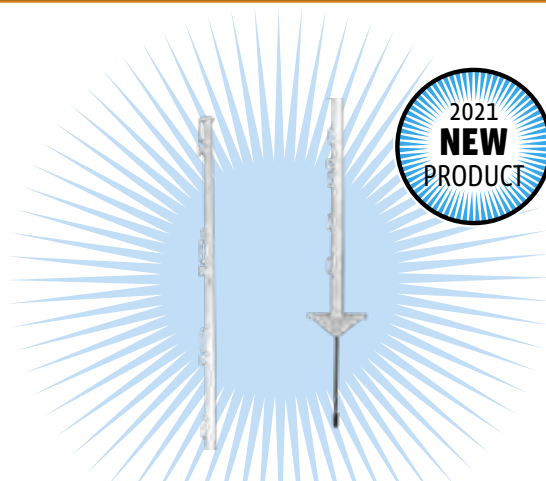

## Ring Top post



The most popular option for dairy and beef cattle, practical design for stronger posts, no tangling and better grip in the ground.



**723136** Orange - 1,00m ☞ = 10

## Pigtail post



Plastic coated spring steel post with UV stabilised plastic insulated orange pigtail insulator. If several wires are to be used, add screw-on insulator part no. 010950/010943. Maximum fence height: 0.85m.



**642134** Orange - 1,00m ☞ = 10

**010950** Screw-on rod insulator black 4/10mm ☞ = 20

**010943** Screw-on rod Insulator white 6/14mm ☞ = 10

**010950** Screw-on rod insulator black 4/10mm ☞ = 20

## Quattro post



Very sturdy, lightweight spring steel post with 4 removable insulators. Maximum fence height 87.5cm. The 10cm double pointed foot makes it easy to install. White insulated coating for maximum visibility and to avoid shorting problems.




**064253** White - 1,00m ☞ = 10

**067513** Isolator Quattro paal (10) ☞ = 10



## Spring steel pigtail post



Strong mild-steel post with blue top-insulator and large welded on foot for easy tread-in installation. Use part 004218 or 010950 if you use more wires. Maximum fence height: 0.88m.



**019250** Steel - 1,10m ☞ = 10

**008155** Insulator for Steel Pigtail post (5) ☞ = 5

**010936** Screw-on rod insulator green 8,5/13mm ☞ = 20

**010950** Screw-on rod insulator black 4/10mm ☞ = 20

**010943** Screw-on rod Insulator white 6/14mm ☞ = 10



**008902** Spring steel post 1,00m (1) ☞ = 1

**010752** Click-on insulator for Spring steel post (10) ☞ = 10

**009411** Topinsulator for Spring steel post (5) ☞ = 5

**010936** Screw-on rod insulator green 8,5/13mm ☞ = 20

**010950** Screw-on rod insulator black 4/10mm ☞ = 20

**010943** Screw-on rod Insulator white 6/14mm ☞ = 10



## Horse post



Unique and durable post, 1.55m high, which is ideal for semi-permanent horse fencing. Easy to tread by using the convenient stirrup foot. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors up to 1.35m high.

<b>061303</b>	Duopack White - 1,55m (2x5)	☞ = 10
<b>061310</b>	Duopack Horse post terra 1,55m (2x5)	☞ = 10
<b>019328</b>	Horse post white 1,55m (5)	☞ = 5
<b>060771</b>	Horse post terra 1,55m (5)	☞ = 5
<b>077304</b>	Horse post terra 1,05m (10)	☞ = 10

**PROMOTION**

**PROMOTION**



## Duopack Vario post




Very sturdy and durable plastic post 1.00m high with 9 numbered lugs designed for virtually all kinds of animals. Suitable for all sorts of (poly)wire and tape up to 20mm. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors with a maximum wire height of 0.85m.

<b>069330</b>	Duopack White - 1,00m (2x10)	☞ = 20
<b>072507</b>	Duopack Vario post terra 1,00m (2x10)	☞ = 20
<b>028481</b>	Vario post white 1,00m (10)	☞ = 10
<b>071043</b>	Vario post terra 1,00m (10)	☞ = 10

**PROMOTION**

**PROMOTION**

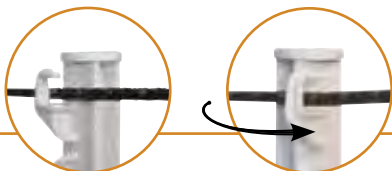

The unique Twist & Lock system ensures easy and stable connection of your conductors. With this system you can fit the conductors with one twist of your hand!



## Hobby post



Very sturdy and durable post, 0.75m high, with 6 numbered lugs and extra strong footing. Suitable for tape up to 20mm, rope and polywire. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors with a maximum wire height of 50cm.



<b>057849</b>	White - 0,75m	☞ = 10
<b>021468</b>	Hobby post terra 0,75m (10)	☞ = 10

## Deer post plastic



Simple solid post for mobile fences to 1.50 m (# 063475) or 1.80 m (# 063482). Wire clips # 063499 to assemble at any desired height. Top insulator is removable so clips can easily be confirmed.



<b>063482</b>	Black - 19mm - 2,00m	☞ = 10
<b>063475</b>	Deer post plastic black 19mm 1,70m (10)	☞ = 10
<b>063499</b>	Stainless steel Clips for Deer post 19mm (25)	☞ = 25



## Garden/Pond post



Compact, curved plastic post for mobile fences for deterring herons. Ideal for use near a pond. With curve as extra protection against animals leaning over and overhanging plants. For use in combination with plastic wire. Easy to fit. Maximum fence height: 51cm. Product warranty: 2 years.




**065035** Black - 0,50m = 5

## Plastic post



An extremely practical and simple grazing post. Unique top insulator which is resistant to damage if you knock the post into the ground with a hammer. Maximum fence height: 024421-1,35m.



**024421** Blue - 13mm - 1,50m = 10

**024414** Plastic post blue 13mm 1,00m (10) = 10

**024391** Plastic post blue 13mm 0,70m (10) = 10

**003266** Stainless steel Clip for Plastic post 13mm (10) = 10

**2211** Top insulator PVC post 13mm (1) = 1

**010943** Screw-on rod Insulator white 6/14mm = 10

## Plastic post



An extremely practical and simple grazing post. Unique top insulator which is resistant to damage if you knock the post into the ground with a hammer. Maximum fence height: 024391/024407-0,50m



**024407** Black - 13mm - 0,70m = 10

**003266** Stainless steel Clip for Plastic post 13mm (10) = 10

**2211** Top insulator PVC post 13mm (1) = 1

**010943** Screw-on rod Insulator white 6/14mm = 10

**083817** Plastic post black 13mm 0.98m (10) = 10

## Fibreglass post



Fibreglass post ø10mm for semi-permanent fences. Ideal in combination with polywire or 1,6mm High Tensile wire. Please use fibreglass clip 018300 (25) as wireholders.



**008172** Fibreglass 10mm - 1,50m = 1

**008158** Fibreglass post white 10mm 1,25m = 50

**018300** Inox Clip 10mm for Fibreglass post (25) = 25

**010936** Screw-on rod insulator green 8,5/13mm = 20

**010950** Screw-on rod insulator black 4/10mm = 20

**010943** Screw-on rod Insulator white 6/14mm = 10

## Tumble wheel



One person can move a whole fence within a matter of minutes using the tumble wheels. The strip grazing system reduces the grazing cycles and increases the yield. Ask your dealer for more information. Maximum fence height: 0.78m.



**056388** Tumble wheel = 5









The conducting wire in electric fencing is of crucial importance, because it transports the current. Even though all conducting wires would appear to be the same, there is a big difference in terms of price and quality. There are also differences in use. The Gallagher range consists of tape, cord, plastic wire, Equifence and High Tensile. Each of them with their different conductivity, durability and design. Make sure you choose the right conducting wire for your use!

## ElectroMax wire



15% more conductive than standard 2,5mm high tensile wire. Carries power further and handles shorts better. Patented zinc-alu alloy outer surface for up to 3 times longer life than standard high tensile wire.

<b>069385</b>	HT - ø2,65mm - 600m - 26kg	 = 1
<b>036257</b>	Tension spring for 2,5mm/2,65mm HT/EQ wire (1)	 = 1
<b>021475</b>	Wire tensioner (25)	 = 25
<b>010882</b>	Wire tensioner (3)	 = 3
<b>603568</b>	Joint clamp bobbin with hex nut (100)	 = 100
<b>060498</b>	Joint clamp angle with hex nut (100)	 = 100



## Zinc-alu-mag wire



Steel cored, high tensile fence wire with an aluminium coating for longer life and greater conductivity. Permanent Wire Tensioner and Tension Springs can be used to strain the wire.

<b>039999</b>	HT - ø2,5mm - 625m - 25kg	 = 1
<b>077311</b>	HT zinc-alu-mag wire 1,8mm - 25kg - 1250m	 = 1
<b>004188</b>	HT zinc-alu-mag wire 1,6mm - 25kg - 1580m	 = 1
<b>004195</b>	HT zinc-alu-mag wire 1,6mm - 5kg - 315m	 = 1
<b>036257</b>	Tension spring for 2,5mm/2,65mm HT/EQ wire (1)	 = 1
<b>004133</b>	Tension spring for 1,6mm/1,8mm wire (1)	 = 1
<b>021475</b>	Wire tensioner (25)	 = 25
<b>010882</b>	Wire tensioner (3)	 = 3
<b>603568</b>	Joint clamp bobbin with hex nut (100)	 = 100
<b>060498</b>	Joint clamp angle with hex nut (100)	 = 100





## Zinc-alu-mag wire



Erecting a permanent fence becomes very simple with this aluminised fencing wire. Easier to bend than regular HT wire, but strong enough to keep sheep, cattle or game in/out. Very low resistance, which makes this wire ideal for long fence lines.



<b>060412</b>	MT - ø1,8mm - 500m - 10kg	☞ = 1
<b>036257</b>	Tension spring for 2,5mm/2,65mm HT/EQ wire (1)	☞ = 1
<b>021475</b>	Wire tensioner (25)	☞ = 25
<b>010882</b>	Wire tensioner (3)	☞ = 3
<b>603568</b>	Joint clamp bobbin with hex nut (100)	☞ = 100
<b>060498</b>	Joint clamp angle with hex nut (100)	☞ = 100

## Stranded wire



High conductive 7 strand galvanised wire for long portable fences which are affected by growth. To be used with Cow, Sheep and game fences.



<b>007806</b>	ø2mm - 400m - 6kg	☞ = 1
<b>008759</b>	Stranded wire 2,0mm - 3kg - 200m	☞ = 1

## TurboStar Equifence



Consists of a metal core with a UV-resistant coating on the outside. This coating makes the wire enormously strong, but soft when a horse comes into contact with it accidentally. TurboStar Equiwire contains 33% more conductive material than the current Equiwire.

<b>912042</b>	White 250m	☞ = 1
<b>912240</b>	TurboStar Equifence terra 250m	☞ = 1
<b>036257</b>	Tension spring for 2,5mm/2,65mm HT/EQ wire (1)	☞ = 1
<b>021475</b>	Wire tensioner (25)	☞ = 25
<b>010882</b>	Wire tensioner (3)	☞ = 3
<b>603568</b>	Joint clamp bobbin with hex nut (100)	☞ = 100
<b>060498</b>	Joint clamp angle with hex nut (100)	☞ = 100

Superior conductivity



## Equifence



The safest solution for your horse. Unique electrically conductive polymer (in black stripes) allows use as electric fence wire. Provides you, in combination with tension springs, ultimate safety for your horse. Total diameter of 7.5mm with a core of 2.5mm high tensile wire.

<b>009124</b>	White - 7,5mm - 250m - 20kg	☞ = 1
<b>053858</b>	Equifence terra 7,5mm - 20kg - 250m	☞ = 1
<b>036257</b>	Tension spring for 2,5mm/2,65mm HT/EQ wire (1)	☞ = 1
<b>021475</b>	Wire tensioner (25)	☞ = 25
<b>010882</b>	Wire tensioner (3)	☞ = 3
<b>603568</b>	Joint clamp bobbin with hex nut (100)	☞ = 100
<b>060498</b>	Joint clamp angle with hex nut (100)	☞ = 100





Vidoflex 12 TurboLine Plus



The most conductive TurboLine Plus poly wire -3.0mm- for portable fencing. The 6 stainless-steel wires and 4 galvanised copper wires conduct 80 times better than a standard poly wire. This TurboLine Plus model is 50% stronger, does not stretch and is even more clearly visible. Available in white. It has a 5-year UV warranty.

079377	White - 400m	☞ = 1
060764	Vidoflex connector (4)	☞ = 4



Duopack Vidoflex 9 TurboLine Plus



52% stronger than traditional polywire. Will not twist or kink when winding onto reels. Ideal for long portable fences, the patented mixed metal conductive wires carry the pulse 40 times better than standard PowerLine wire. Always use TurboLine products if fence > 500m.

079421	Duopack White - 2x1000m	☞ = 2
075775	Vidoflex 9 TurboLine Plus Terra 1000m	☞ = 1
069323	Duopack Vidoflex 9 TurboLine Plus White 2x400m	☞ = 2
011254	Vidoflex 9 TurboLine Plus White 400m	☞ = 1
054862	Vidoflex 9 TurboLine Plus Terra 400m	☞ = 1
069316	Duopack Vidoflex 9 TurboLine Plus White 2x200m	☞ = 2
011247	Vidoflex 9 TurboLine Plus White 200m	☞ = 1
049028	Vidoflex 9 TurboLine Plus White 1000m	☞ = 1
060764	Vidoflex connector (4)	☞ = 4

PROMOTION

PROMOTION

PROMOTION



Vidoflex 6 PowerLine



Thick polywire with 6 stainless steel wires providing excellent conductivity. Ideal for portable fences. UV stabilised and high tensile strength for longer life.



072422	White - 1000m	☞ = 1
021697	Vidoflex 6 PowerLine White 400m	☞ = 1
054855	Vidoflex 6 PowerLine Terra 400m	☞ = 1
021680	Vidoflex 6 PowerLine White 200m	☞ = 1
063970	Vidoflex 6 PowerLine Terra 200m	☞ = 1
060764	Vidoflex connector (4)	☞ = 4

Vidoflex 3 PowerLine



Polywire with 6 Stainless Steel wires. Suitable for short portable fences. Available in 100m (brown) and 200m (white).



010554	White - 200m	☞ = 1
063987	Vidoflex 3 PowerLine Terra 100m	☞ = 1
019335	Vidoflex 3 PowerLine Green 100m	☞ = 1
060764	Vidoflex connector (4)	☞ = 4



## TurboLine Blue Polywire



Blue plastic wire developed especially to keep wild animals out, particularly suitable for wild boar. Studies have demonstrated that wild boar have poor eyesight and that they mainly see the colour blue. Protect your crops with this extremely conductive wire.

<b>079452</b>	Duopack Blue - 2x400m	☞ = 2
<b>072477</b>	TurboLine Blue Polywire 1000m	☞ = 1
<b>075829</b>	TurboLine Blue Polywire 400m	☞ = 1
<b>079384</b>	TurboLine Blue Polywire 200m	☞ = 1
<b>060764</b>	Vidoflex connector (4)	☞ = 4

## TurboLine rope



Braided TurboLine Cord prevents a lot of stretching and ensures a long life. By using 3 tinned copper wires in combination with 8 stainless steel wires an optimal conductivity is realised. Soft-touch cord provides high safety for your animals.



<b>058006</b>	White - 500m	☞ = 1
<b>057993</b>	TurboLine rope braided Terra 500m	☞ = 1
<b>057856</b>	TurboLine rope braided White 200m	☞ = 1
<b>056101</b>	TurboLine rope braided Terra 200m	☞ = 1
<b>071159</b>	Rope connector (25)	☞ = 25
<b>019342</b>	Rope connector (4)	☞ = 4
<b>075928</b>	Rope connector with wingnut (4)	☞ = 4
<b>028955</b>	Rope tensioner (1)	☞ = 1

## PowerLine rope



Braided PowerLine Rope for (semi) permanent fences, suitable for horses and cattle. With 5 stainless steel wires and 1 tinned copper wire for high conductivity. UV stabilised. Post spacing up to 8m.



<b>072453</b>	White - 500m	☞ = 1
<b>072460</b>	PowerLine rope braided Terra 500m	☞ = 1
<b>063956</b>	PowerLine rope braided White 200m	☞ = 1
<b>063963</b>	PowerLine rope braided Terra 200m	☞ = 1
<b>071159</b>	Rope connector (25)	☞ = 25
<b>019342</b>	Rope connector (4)	☞ = 4
<b>075928</b>	Rope connector with wingnut (4)	☞ = 4
<b>028955</b>	Rope tensioner (1)	☞ = 1

## Duopack TurboLine rope



Braided TurboLine Cord prevents a lot of stretching and ensures a long life. By using 3 tinned copper wires in combination with 8 stainless steel wires an optimal conductivity is realised. Soft-touch cord provides high safety for your animals.



**PROMOTION**

<b>069798</b>	Duopack White - 2x500m	☞ = 2
<b>069804</b>	Duopack TurboLine rope braided Terra 2x500m	☞ = 2
<b>069293</b>	Duopack TurboLine rope White 2x200m	☞ = 2
<b>069309</b>	Duopack TurboLine rope braided Terra 2x200m	☞ = 2
<b>071159</b>	Rope connector (25)	☞ = 25
<b>019342</b>	Rope connector (4)	☞ = 4
<b>075928</b>	Rope connector with wingnut (4)	☞ = 4
<b>028955</b>	Rope tensioner (1)	☞ = 1

## EconomyLine rope



PowerLine Rope for semi permanent fences, suitable for horses and cattle. With 5 stainless steel wires for high conductivity. UV stabilised. Post spacing up to 8m.



<b>063932</b>	White - 500m	☞ = 1
<b>063925</b>	EconomyLine rope White 200m	☞ = 1
<b>063949</b>	EconomyLine rope Terra 200m	☞ = 1
<b>063918</b>	EconomyLine rope White 100m	☞ = 1
<b>071159</b>	Rope connector (25)	☞ = 25
<b>019342</b>	Rope connector (4)	☞ = 4
<b>075928</b>	Rope connector with wingnut (4)	☞ = 4
<b>028955</b>	Rope tensioner (1)	☞ = 1



## TurboStar tape



TurboStar Tape is a premium 40mm tape which has the lowest resistance available today. It has 40 times better conduction than regular tape and will result in more power on your fence due to 10 stainless steel wires and 4 mixed metal wires. Post spacing up to 6m. The sturdy and breathable features prevent tensioning regularly. Available in green, terra and white on 200m rolls and white and terra on 350m rolls.

070862	40mm - White - 350m	☞ = 1
070879	TurboStar tape 40mm Terra 350m	☞ = 1
010608	TurboStar tape 40mm White 200m	☞ = 1
010615	TurboStar tape 40mm Terra 200m	☞ = 1
010516	TurboStar tape 40mm Green 200m	☞ = 1
072439	TurboStar tape 40mm White 100m	☞ = 1
072446	TurboStar tape 40mm Terra 100m	☞ = 1
007592	TurboLine tape 40mm White 200m	☞ = 1
028962	Tape joiner 20/40mm (5)	☞ = 5
010745	Tape joiner 20/40mm (5)	☞ = 5
055333	Tape connector tape/tape 60cm (1)	☞ = 1

PROMOTION



## TurboLine tape



Very strong TurboLine Tape with reinforced red edges, suitable for semi-permanent horse fencing. Blends in with the surroundings so it is not so conspicuous. 40 times more conductive than standard Powerline tape. Post spacing up to 6m. Always use TurboLine products if fence > 500m.



007608	20mm - White - 200m	☞ = 1
060702	TurboLine tape 20mm Terra 200m	☞ = 1
028962	Tape joiner 20/40mm (5)	☞ = 5
010745	Tape joiner 20/40mm (5)	☞ = 5
055333	Tape connector tape/tape 60cm (1)	☞ = 1

PROMOTION

PROMOTION

## TurboLine tape



Strongly conductive tape for portable cattle and horse fencing. Power guaranteed from beginning to end due to vertical stainless-steel wires. The blue colour makes this tape particularly suitable for keeping game animals away from your own animals, because wild animals see the colour blue particularly well.



079391	12,5mm - Blue - 200m	☞ = 1
028979	For 12,5/20mm tape	☞ = 5

## Duopack TurboLine tape



12,5mm TurboLine Tape. The horizontal wires are interconnected at 13 cm intervals ensuring better conductivity. 40 times more conductive than standard polytape. Ideal for portable electric fences. Post spacing up to 5m. 200m and 400m rolls. Always use TurboLine tape if fence > 500m.

079438	Duopack 12,5mm - White - 2x400m	☞ = 2
086231	TurboLine tape 12,5mm White 400m	☞ = 1
079445	Duopack TurboLine tape 12,5mm White 2x200m	☞ = 2
076232	TurboLine tape 12,5mm White 200m	☞ = 1
028979	For 12,5/20mm tape	☞ = 5

PROMOTION

PROMOTION

PROMOTION

PROMOTION





### PowerLine tape



Highly visible tape with black reinforced edges. 11 thick stainless steel wires and 1 mixed metal wire for excellent conductivity.



<b>006246</b>	40mm - White - 200m	🔌 = 1
<b>060696</b>	PowerLine tape 40mm Terra 200m	🔌 = 1
<b>028962</b>	Tape joiner 20/40mm (5)	🔌 = 5
<b>010745</b>	Tape joiner 20/40mm (5)	🔌 = 5
<b>055333</b>	Tape connector tape/tape 60cm (1)	🔌 = 1

### PowerLine tape



Strong, 12.5mm PowerLine Tape with 4 thick stainless steel wires for good conductivity. Suitable for portable fences for cattle, young stock and horses. Post spacing up to 5m.



<b>026237</b>	12,5mm - White - 200m	🔌 = 1
<b>062303</b>	PowerLine tape 12,5mm White 100m	🔌 = 1
<b>028979</b>	Tape joiner 12,5/20mm (5)	🔌 = 5

### PowerLine tape



Clearly visible PowerLine Tape with black reinforced edges. Ideal for semi-portable horse fencing. 5 thick stainless steel wires and 1 mixed metal wire for good conductivity. Post spacing up to 5m.



<b>106236</b>	20mm - White - 200m	🔌 = 1
<b>028962</b>	Tape joiner 20/40mm (5)	🔌 = 5
<b>010745</b>	Tape joiner 20/40mm (5)	🔌 = 5
<b>055333</b>	Tape connector tape/tape 60cm (1)	🔌 = 1





Reels are used for portable fencing to wind or unwind the fencing wire. It can be fixed with the reel corner post to produce a strong construction.

If you are going to put up electric fencing you simply need the right tools. Whether you need to tension High Tensile fencing, cut wire, or screw down insulators, the job is simple when you use Gallagher tools.




### Triple Geared Reel Stand pre-installed



Triple Geared Reel Stand with 4.0m Vidoflex polywire. Pre-assembled with post and three pre-wound Geared Reels (061139).

Post height 1070mm and reels are pre-wound with 400m Vidoflex polywire. Suitable for containing all types of animals. Multi reel connector (006345) available separately.

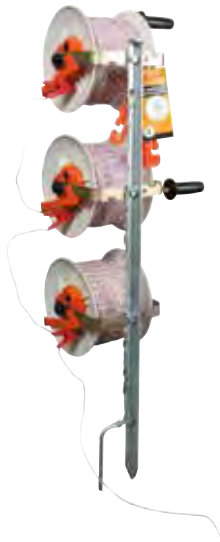

633046 Incl. 3 Geared reel and rope

⚙️ = 1

### Large geared reel 1200m



Heavy duty gearbox for easy winding, fast wind in (2.7:1). Large comfortable hand grip with knuckle guard for safer use. Holds: 400m 12.5mm TurboLine tape, 400m 12,5mm PowerLine tape, 1000m Vidoflex 9 or 1200m Vidoflex 6.



016313 Large geared reel 1200m

⚙️ = 1



## Geared reel 500m



Equipped with an accelerator mechanism so the drum rotates three times faster than standard reels. Carry handle with knuckle guard. Locking ratchet. Long crank arm for better leverage. Wire loop for connecting power to wire/tape. Holds up to 500 metres of polywire or 200 metres of tape. Attachable to Reel Stand.



## Medium reel 500m



Carry handle with knuckle guard to protect hands. Locking ratchet. Long crank arm for better leverage. Wire loop for connecting power to wire/tape. Holds up to 500 metres of polywire or 200 metres of tape. Can be attached to Reel Stand. Fully galvanized frame.



061139 Geared reel 500m

☞ = 1

061115 Medium reel 500m

☞ = 1

## Econoreel 500m



A strong and durable reel with ratchet mechanism for winding up and unwinding polywire. Suitable for up to 500m polywire. Equipped with insulated handle. Hooks directly to fence or use Reel Stand.



## Geared reel pre-installed Polywire 500m



Reel with gear mechanism. Large handle with knuckle guard. Includes 500 m polywire.



046167 Econoreel 500m

☞ = 1

061184 Geared reel pre-installed Polywire 500m

☞ = 1

## Reel 400m



Convenient plastic reel with ratchet for 400 metres of polywire. Detachable drum.



## Reel 200m



Low cost convenient plastic reel with ratchet for 200 metres of polywire.



008919 Reel 400m

☞ = 1

009145 Spare drum for Reel 400m

☞ = 1

008933 Reel 200m

☞ = 1

## Reel/Termination post



This post can be used together with a max. of 5 reels or insulators. In combination with the insulators, this reel corner post is perfect as the start or end post of portable fencing. In combination with the reels it is really easy to put up portable fencing.

081967 Supports 5reels/insulators - 2,00m

☞ = 1

022014 Reel/Termination post fits 3 Reels/3 Insulators 1,25m

☞ = 1

082766 Reel/Termination post Reel bracket (5)

☞ = 5

022205 Reel/Termination post Support bracket

☞ = 1

006345 Multi reel connector set

☞ = 1





With our range of insulators we provide a solution for every type of fencing.

Whether you use tape, cord, plastic wire, EquiFence or aluminium-coated wire, Gallagher has it all. Our insulators stand out in terms of price, quality and durability.





### Wire clip insulator for Line Post



You need this wire clip if you want to fit fencing wire or cord of up to 8mm (Gallagher EquiFence/permanent cable) to a Line Post. These clips have been developed especially for the Gallagher Line Post.



**082285** Wire clip insulator for Gallagher Line Post (100)  = 100


**744346** Wire clip insulator for Gallagher Line Post (20)  = 20


### XDI screw-in insulator wood




Improved screw-in insulator with unique advantages over traditional black screwing insulators. Much stronger due to the new technology.



**060788** For (poly) wire and rope  = 250

**025527** XDI screw-in insulator (125)  = 125

**065059** XDI screw-in insulator (75)  = 75

**025510** XDI screw-in insulator (25)  = 25

**077397** Drill chuck Pro  = 1


**053933** Drill chuck Basic  = 1




### XDI bolt-on insulator M6x23mm metal



High quality Bolt-on insulator with metal core. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord on a steel post, like the Termination post (022014/022236). (External thread length 25mm M6 incl. 2xnut, total length 33mm).

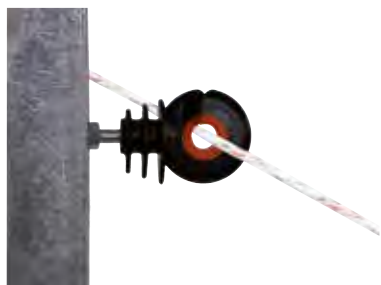




<b>079094</b>	For (poly) wire and rope	 = 125
<b>057795</b>	XDI bolt-on Insulator (10)	= 10

## Screw-in insulator wood



Low-priced, high quality screw-in insulator without metal core.  
Suitable for wooden posts.






<b>060894</b>	For (poly) wire and rope	 = 75
<b>077397</b>	Drill chuck Pro	 = 1
<b>053933</b>	Drill chuck Basic	 = 1

## Screw-in Insulator Promopack



With metal core. High-quality black plastic. For wooden posts. Suitable for (poly) wire and cord.








<b>071074</b>	Screw-in Insulator in bag	 = 100
<b>077397</b>	Drill chuck Pro	 = 1
<b>053933</b>	Drill chuck Basic	 = 1

### Screw-in insulator wood small



Solid High quality screw-in insulator without metal core, therefore no short circuiting possible. For adding a wire to a wooden fence post.





<b>011193</b>	For wire and rope	 = 250
<b>040711</b>	screw-in insulator small (125)	 = 125
<b>004089</b>	Screw-in insulator small (25)	 = 25
<b>077397</b>	Drill chuck Pro	 = 1
<b>053933</b>	Drill chuck Basic	 = 1

### Screw-in insulator super in bucket (175)



High quality screw-in insulator without metal core, therefore no short circuiting possible. For adding a wire to a wooden fence post. Type 009008 also suitable for 12.5mm tape.



<b>079537</b>	For wire, rope and 12,5mm tape	 = 175
<b>077397</b>	Drill chuck Pro	 = 1



## Screw-in insulator wood Super



High quality screw-in insulator without metal core, therefore no short circuiting possible. For adding a wire to a wooden fence post. Type 009008 also suitable for 12,5mm tape.



<b>011209</b>	For wire, rope and 12,5mm tape	☞ = 250
<b>040728</b>	Screw-in insulator super (100)	☞ = 100
<b>009008</b>	Screw-in insulator super (25)	☞ = 25
<b>077397</b>	Drill chuck Pro	☞ = 1

## W-insulator Small



Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Suitable for guiding wire around a corner post.



<b>028498</b>	For polywire and wire / black	☞ = 175
<b>006734</b>	W-insulator small black (25)	☞ = 25
<b>050000</b>	Gallagher Screws 4,5x40 T25 (200)	☞ = 200

## Corner insulator Extra High Voltage



Designed for high powered fencing systems and areas where insulation is critical. Insulation ribs provide 2 x the insulation performance of previous models to reduce chances of stray voltage around critical areas. The streamlined design allows a comfortable positioning in hand during the installation. The wire can be easily cut away for product reuse.

<b>100003</b>	For rope and wire / white	☞ = 100
<b>100002</b>	Corner insulator Extra High Voltage white (10)	☞ = 10

## W-insulator Super



Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Also suitable for guiding wire around a corner post.



<b>067617</b>	For rope and Equifence/white	☞ = 175
<b>021055</b>	W-insulator super black (175)	☞ = 175
<b>067612</b>	W-insulator super white (25)	☞ = 25
<b>067605</b>	W-insulator super black (25)	☞ = 25
<b>050000</b>	Gallagher Screws 4,5x40 T25 (200)	☞ = 200

## Claw Insulator concrete



Insulator for permanent fencing with flat back for stable fitting on a concrete post. Suitable for HT wire and Vidoflex.



<b>709048</b>	For polywire and wire / black	= 25
---------------	-------------------------------	------



[www.gallagher.eu](http://www.gallagher.eu)



## Strain insulator S reinforced



Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate



<b>012022</b>	For rope and wire / white	☞ = 100
<b>678061</b>	Strain insulator reinforced black (100)	☞ = 100
<b>011032</b>	Strain insulator reinforced white (5)	☞ = 5
<b>678023</b>	Strain insulator reinforced black (5)	☞ = 5

## Strain insulator S



Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate



<b>012015</b>	For rope and wire / black	☞ = 100
<b>011025</b>	Strain insulator black (5)	☞ = 5

## Porcelain strain/corner insulator



A porcelain corner insulator to strain the wires on the corner posts



<b>053506</b>	For wire	☞ = 60
<b>015139</b>	Porcelain strain/corner insulator (6)	☞ = 6

## Porcelain corner insulator



A porcelain End-strain Insulator for high tensions



<b>015141</b>	For wire	☞ = 60
<b>015146</b>	Porcelain corner insulator (6)	☞ = 6

## High Strain insulator Kit with stainless steel rope




Simplest option for end strain insulation. Long life Super Strain Insulator with pre-attached stainless steel rope. Simple install, no wire tying or special tools required. Fits up to 200mm/8" pos



<b>079483</b>	For rope and wire / white	☞ = 5
---------------	---------------------------	-------

## Roller screw-in insulator



Innovative Gallagher design. Easy to install. Suitable for poly wire and rope. The special design means the wire always returns to the roll.



## Rope tensioner



For easy tensioning of rope. Easy release thumb catch. For use in combination with the roller screw-in insulator. (# 029013) or the strain insulator (# 011025/011032). Comes as standard with a roller screw-in insulator.



<b>029013</b>	For polywire and rope	☞ = 5
---------------	-----------------------	-------


<b>028955</b>	Rope tensioner	☞ = 1
---------------	----------------	-------



Roller screw-in insulator



For use with Termination post (022014/022236) or for fixing to a wooden fence post. Only suitable for poly wire.



010707 For polywire ⚙️ = 5

Roller bolt-on insulator



For use with Termination post (022014/022236). Only suitable for poly wire. External thread length 28mm. M8 incl. 2 x nut.



010714 For polywire ⚙️ = 5

Clips for Insultimber/Ecopost



We recommend the use of Part.No 011056 for fixing wire to an Insultimber post or Gallagher Ecopost. Use Part.No 011063 with 1 metre droppers. You can tighten the clips using the wire twister (part.no 005232).



024704 Long 150mm / for wire ⚙️ = 1000

011063 Clips long for Insultimber/Ecopost (50) ⚙️ = 50

Clips for Insultimber/Ecopost



We recommend the use of Part.No 011056 for fixing wire to an Insultimber post or Gallagher Ecopost. Use Part.No 011063 with 1 metre droppers. You can tighten the clips using the wire twister (Part.No 005232).



024698 Short 100mm / for wire ⚙️ = 1000

011056 Clips short for Insultimber/Ecopost (25) ⚙️ = 25

TurboLine Line Post tape clip



Fast install, easy to use no tools required. Positive locking and quick release to enable re-tensioning of tape. Soft rubber pads lock tape in place to prevent tape movement and fraying.

082278 TurboLine Tape clip insulator for Gallagher Line Post (100) ⚙️ = 100

747033 TurboLine Tape clip insulator for Gallagher Line Post (12) ⚙️ = 12



TurboLine Horse corner/strain insulator



The new very innovative robust Corner Insulator. Has a lot of advantages compared to the traditional insulators. A unique sub frame for optimal strength and fixation at the post. Pre mounted rubber grip for best tape fixation. Can be installed with only one drill bit. A unique slot to strain and re-strain your tape. The optional metal plate (art. 708027) can be used as a tape connector and gate anchor.

701042 TurboLine Horse corner/strain Insulator (30) ⚙️ = 30

701028 TurboLine Horse corner/strain insulator (5) ⚙️ = 5

708027 Connection plate TurboLine Horse corner/strain Insulator (5) ⚙️ = 5

050000 Gallagher Screws 4,5x40 T25 (200) ⚙️ = 200





## TurboLine Horse insulator



Insulator with soft faces to lock the tape between two rubber sleeves (patented system). Fixes the tape with 1 click and prevents wearing guaranteeing a long life for your tape. Additional screw can be used to tighten the insulator even more.




<b>699066</b>	For up to 40mm tape	☞ = 100
<b>699004</b>	TurboLine Horse insulator (20)	☞ = 20
<b>050000</b>	Gallagher Screws 4,5x40 T25 (200)	☞ = 200

## TurboLine tape insulator



Insulator with soft faces to lock the tape between two rubber sleeves (patented system) to prevent the wear off guaranteeing a long life for your tape.



<b>021482</b>	For up to 40mm tape	☞ = 100
<b>011087</b>	TurboLine Tape insulator (20)	☞ = 20
<b>050000</b>	Gallagher Screws 4,5x40 T25 (200)	☞ = 200

## TurboLine corner/strain insulator



Specially designed corner insulator in high quality plastic which secures the tape between 2 rubber sleeves (patented system), guaranteeing long life for your tape. Use the stainless steel connecting plate (Part No. 010745) for end (gate) posts to ensure good connection between the tapes.



<b>043880</b>	For up to 40mm tape	☞ = 30
<b>016702</b>	TurboLine corner/strain insulator with wingnut (5)	☞ = 5

## PowerLine tape insulator



Insulator used to fix 40mm tape to wooden fence post. Can be stapled, nailed or screwed to post. The tape is very easy to fix.



<b>040674</b>	For up to 40mm tape	☞ = 125
<b>011094</b>	PowerLine Tape insulator (25)	☞ = 25
<b>050000</b>	Gallagher Screws 4,5x40 T25 (200)	☞ = 200

## XDI offset screw-in insulator wood 18cm



Innovative Gallagher design. Much stronger than the standard offset screw-in insulator thanks to a new technique, and more durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.



<b>042647</b>	For (poly) wire and rope	☞ = 100
<b>028993</b>	XDI offset screw-in insulator 18cm (10)	☞ = 10

## XDI offset screw-in insulator wood 10cm



Innovative design. Much stronger than the standard offset screw-in insulator thanks to a new technique. More durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.




<b>077274</b>	For (poly) wire and rope	☞ = 100
<b>075904</b>	XDI offset screw-in insulator 10cm (20)	☞ = 20



### XDI offset screw-in insulator wood bended 18cm



High quality offset insulator (18cm) with metal core, helps prevent damage to non-electric fences. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord.



**057818** XDI offset screw-in insulator bended  
18cm (100)  = 100

**057801** XDI offset screw-in insulator bended  
18cm (10)  = 10

### Offset screw-in insulator wood 10cm



Solid high quality offset screw-in insulator (10cm) for wooden posts. Without metal core. Suitable for (poly) wire and cord.



**082711** For (poly) wire and rope  = 90

**072491** Offset screw-in insulator 10cm (20)  = 20

## Mounting bracket 40/60mm



Mounting bracket. Fits on every garden wire enclosure. Incl. a connection point suitable for M6 and M8 thread insulators to also protect your garden wire enclosure. Fitted with a rubber insert to prevent damage to the post.



**008780** Supports M6 and M8  = 5

**Live Tip offset insulator wood 26cm**



With an electrified tip and zero leakage through the post, the live tip offsets are an effective, new option for protecting existing fences. 10 year product warranty.



**006190** For wire and rope  = 20

**006183** Live Tip offset insulator 16cm (20)  = 20

**XDI offset bolt-on insulator metal 20cm/M6**



Innovative Gallagher design. Much stronger than the standard offset insulator due to a new technique, and more durable due to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. (Total length 200mm, external thread length 125mm M6 incl. 2xnut/washer).



**029006** For (poly) wire and rope  = 10

### Fence Insulator for pos/neg system



This insulator has been developed especially for fitting on a spacer insulator. With this combination you can quickly and easily create a plus-minus fencing on your fence to keep cats out or in your garden.



**077335** For polywire  = 30

### Offset screw-in insulator 20cm



For electrifying non-electric fences quickly and effectively. Distance 20cm. With insulator suitable for wire and rope up to 9mm.



**009350** For polywire and rope  = 10

**007516** Offset bolt-on insulator 20cm/M6 (10) ~~85~~ = 10

### Live Tip Offset bolt-on insulator 26cm/M6



The bolt on live tip insulator is the perfect solution for all heavy duty needs. The live tip ensures that the insulator will also provide a shock to any curious critter that dares touch it. Being able to bolt straight through any existing posts or panels regardless of material means you can electrify an existing fence. An excellent solution for all heavy duty fencing requirements.



2021  
**NEW**  
PRODUCT

**752334** Live Tip Offset bolt-on insulator  
26cm/M6 (20)  = 20



### Live Tip offset insulator steel post 16cm



With an electrified tip and zero leakage through the post, the live tip offsets are an effective, new option for protecting existing fences. 10 year product warranty.



**006145** For wire and rope ☼ = 20

### Offset Pigtail insulator wood 17,5cm



For electrifying specific existing non-live fences quickly. Available in 2 lengths: 17.5cm or 40cm. Very suitable for rope and tape. Pre-drill hole and staple the offset to the wooden post.




**720234** Offset Pigtail insulator 17,5cm terra (10) ☼ = 10

**010981** Offset Pigtail insulator 17,5cm white (10) ☼ = 10

### Offset Chainlink Insulator cainlink 30cm




For protecting and electrifying chain link netting. The completely galvanized clips are easy to fit to any type of netting. Pin lock insulator makes fixing the wire easy. 32cm long.



**010912** For polywire / black ☼ = 25

### Joint clamp angle



Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wires and rope. Ensures effective electrical joints in the system.



**060498** Angle with hex nut ☼ = 100

### Offset Pigtail insulator wood 40cm



For electrifying specific existing non-live fences quickly. Available in 2 lengths: 17.5cm or 40cm. Very suitable for rope and tape. Pre-drill hole and staple the offset to the wooden post.



**720135** Offset Pigtail insulator 40cm terra (10) ☼ = 10

**010998** Offset Pigtail insulator 40cm white (10) ☼ = 10

### Top mount double end Ring Top offset 80cm



By using this insulator, animals in adjacent pastures cannot come into contact with each other, which is ideal for keeping animals of a different gender apart. The insulator has also been designed to prevent injury if an animal comes into contact with it.



**751528** Top mount double end Ring Top offset 80cm white (5) ☼ = 5

**751924** For wire and rope / terra ☼ = 5

### Offset Pinlock Insulator wire 30cm



For electrifying existing or run down fences. Easy to fix. 30cm long. Large spark guard. Pin lock for easy installation and removal of wires.



**659046** For polywire / black ☼ = 25

### Joint clamp angle



Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wires and rope. Ensures effective electrical joints in the system.



**603964** Angle with wingnut ☼ = 100

**010868** Joint clamp angle with wingnut (10) ☼ = 10



Screw-on rod insulator



For adding extra wire to round portable posts. Ideal for steel pigtail posts.



010943	For 6/14mm post / white	☞ = 10
010936	Screw-on rod insulator green 8,5/13mm	☞ = 20
011230	Screw-on rod Insulator green 8,5/13mm	☞ = 250
010950	Screw-on rod insulator black 4/10mm	☞ = 20

Tension spring



The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 2.5mm and 2.65mm HT wire and EquiFence. Maximum tension strength 200kg. Stainless steel, lenght spring 345mm, Productwarranty 10 Year.



036257	For HT/EQ ø2,5mm/2,65mm	☞ = 1
--------	-------------------------	-------

Wire tensioner



Use of this unique tensioner means that the wire does not have to be cut to strain it. Consequently, the power in the wire will be uninterrupted. Strong, lightweight, rust resistant construction. Can be used to join wires.



021475	Wire tensioner	☞ = 25
010882	Wire tensioner (3)	☞ = 3
029044	Wire tensioner Basic	☞ = 1

Clip lock strainer



Clip lock strainers can be placed in the fence line during or after building your fence. For easy straining and re-straining your wires.




056095	Clip lock strainer	☞ = 2
--------	--------------------	-------

Joint clamp



Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wires. Ensures effective electrical joints in the system. Bobbin clamp also suited for rope.



603568	Bobbin round with hex nut	☞ = 100
010851	Joint clamp bobbin with hex nut (10)	☞ = 10

Tension spring



The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 1.6mm and 1.8mm wire. Maximum tension strength 85kg. Stainless steel, lenght spring 155mm, Productwarranty 10 Year.



004133	For ø1,6mm/1,8mm wire	☞ = 1
--------	-----------------------	-------

Insulated End Strainer



The wire tensioner has a streamlined design with super-strong polycarbonate to prevent rust. A wire clip has been integrated into the design to make it easy to fit an earth cable or connectors.



743134	Insulated End Strainer	☞ = 20
618005	Insulated End Strainer fastening cable (2)	☞ = 2
695303	Handle for tensioner	☞ = 1

Handle for tensioner



Handle specially made for end-strain kit and clip lock strainer, very easy to use.



695303	Handle for tensioner	☞ = 1
--------	----------------------	-------



Connectors are crucial in electric fencing. They are relatively small parts, but essential to proper current conductivity. Knotting wire together produces a loss of power, rendering the fencing ineffective. Fitting a good connector represents a minor investment, but you do have perfect fencing!

## Rope connector with wingnut



This stainless steel clamp provides a good conductive connection between Rope/cord or Vidoflex.



**075928** Rope connector with wingnut  = 4


## Rope connector



This stainless steel clamp provides a good conductive connection between Rope or Vidoflex.



**071159** Rope connector  = 25

**019342** Rope connector (4)  = 4

## Tape joiner



Innovative Gallagher design. For connecting and tensioning tape up to 20mm. Easy to install using the rucksack clasp principle. Now it is easy to connect tension and release tape.



**028979** For 12,5/20mm tape  = 5

## Gate break joiner



Tape clamp for fixing 40mm tape to a gate handle. Can be used with any gate handle.



**010769** Gate break joiner for 40mm tape  = 4

## Tape joiner



To be used in combination with part no. 016702 or for joining and/or connect 20/40mm tape. Gives excellent mechanical and electrical connection. Made from non-rusting stainless steel.



**010745** For 20/40mm tape  = 5

## Tape joiner



Innovative Gallagher design. For connecting and tensioning from 20mm up to 40mm tape. Easy to install using the rucksack clasp principle. Now it is easy to connect tension and release tape.




**028962** For 20/40mm tape  = 5

## Tape connector



Double connector for connecting two rows of tape. Length cable: 60cm.



**055333** Tape / tape connector 60cm  = 1

## Tape connector



Single connector for perfect connection from the energizer to the tape fence line. Length cable: 130cm.



**055340** Tape / energizer connector  = 1



Gallagher has several options for making a gate. Are you familiar with the Gallagher multi-wire gate set? They are ideal! It allows you to open and close the gate with one hand. We also have a tough electric gate for permanent fencing.



### Electrified steel gate



Adjustable, maintenance free gate, fully electrified. Suitable for all permanent fences incl. tape. Will fit gates from 2.5m to 4.5m. Height: 1.0m.



**001064** Gate width 2,5m up to 4,5m ⚡ = 1

### Drive thru Electro gate



A complete gate which can be erected anywhere where you have to drive frequently through a gate. Vehicles can push the gate open and the spring loaded gate closes automatically.




**054923** Gate width 5,0m ⚡ = 1

**004164** Drive thru Electro gate 3,7m ⚡ = 1

### Mobile fence grate



This cattle grid is ideal to move. The grid can be moved because it has connection points for a forklift truck. As there is current on the grid, cyclist can cycle over it, but the animals remain in the fenced-in area. This portable electric grid is available in other sizes upon request.



**075935** Mobile fence grate 2,4x1,3m ⚡ = 1



## Multi strand gate kit



The most complete and easy to use all-in-one multi strand electric gate on the market. Provides a low cost gate solution for practically any width gateway. Comes with 40mm tape.



**718842** 4x 40mm tape terra / 6m ☼ = 1

**718040** Multi strand gate kit 4x12,5mm tape white 6m ☼ = 1

## Retractable auto reel



With the retractable gate, it is easy to create a passage in the fencing. The major benefit is that you are no longer troubled by wires hanging on the ground. The retractable gate is easy to fit and is supplied with a mounting bracket and a gate handle.



**083084** Gate width 18m cord terra ☼ = 1

## Retractable auto reel




Gate system with retractable reel, it automatically rolls and unrolls a walk way up to 1.5m. Simple to install and easy to handle. Comes complete with gate handle and multi directional mounting bracket. Available in white and terra.



**010844** Gate width 15m / tape 40mm white ☼ = 1

**054954** Retractable auto reel terra 15m ☼ = 1

## Spring gate set



Adaptable, gate closure. Complete set, maximum width 5 m. Not recommended for use with horses.



**009084** Gate width 5m ☼ = 1

**016405** Spring gate set white 5m ☼ = 1

## Elastic rope gate set



Complete gate set (conductive cord, terra), to quickly and easily create a passage in a (cord) fence. Easy to open and close by pick up the gate handle in or out of the included gate handle anchor. Suitable for gate passages starting from 3 up to 6 meters wide.



**072354** Gate width 3 up to 6m / terra ☼ = 1

**016412** Elastic rope gate set white 3/6m ☼ = 1

**640556** Elastic rope gate set white 6,5/11m ☼ = 1

## Elastic rope



Strong elastic cord for semi-permanent horse and cattle fences. Also suitable for creating passageway's. Can be stretched up to 2x its own length. With UV protection for long life. Clearly visible.



**891064** Elastic rope white 50m ☼ = 1

**891163** Elastic rope terra 50m ☼ = 1



Batt-Latch Gate Release Timer



Automatic gate opener, including self-closing gate spring. This system is ideal for opening a gate at a pre-set time. Extremely suitable for dairy farming and strip grazing. The system works on a battery with support from solar panels, ensuring the battery lasts longer.








077441	Automatic gate release	 = 1
--------	------------------------	---

Soft touch gate handle



New design gatehandle, Unique rubber soft touch grip.







055722	Soft touch gate handle orange for rope/wire (Stainless steel) (4)	 = 4
697000	Soft touch gate handle orange for rope/wire (Stainless steel) (1)	 = 1
058198	Soft touch gate handle terra for rope/wire (Stainless steel) (4)	 = 4
057979	Soft touch gate handle terra for rope/wire (Stainless steel) (1)	 = 1
010769	Gate break joiner 40mm tape (4)	 = 4

Soft touch gate handle



New design gatehandle, suited specially for tape. Unique rubber soft touch grip.





055715	Soft touch gate handle orange for tape (Stainless steel) (4)	 = 4
696003	Soft touch gate handle orange for tape (Stainless steel) (1)	 = 1
058204	Soft touch gate handle terra for tape (Stainless steel) (4)	 = 4
057986	Soft touch gate handle terra for tape (Stainless steel) (1)	 = 1

Gate handle



Heavy duty, durable gate handles in black and orange. Good visibility and large protective shields. 007585 has a compression hook for easy use. 010769 for attaching tape to a gate handle.



010776	Basic gate handle / orange	 = 1
010783	Gate handle black (1)	 = 1

Dual Purpose Portable handle



Heavy duty, durable gate handles in black and orange. Good visibility and large protective shields. 007585 has a compression hook for easy use. 010769 for attaching tape to a gate handle.



738321	Dual purpose handle	 = 6
--------	---------------------	---

Compression gate handle





Gate handle with compression hook for easy use.



PROMOTION



072408	Gate handle with N-hook / black	 = 10
007585	Compression gate handle N-hook black (1)	 = 1



### Gate handle anchor



Innovative Gallagher design. For attaching a gate handle. Stronger than all other gate handle anchors thanks to the new technique. Made of high-quality materials. Includes connector option for 1,6mm earth cable.



**028986** 2-way / screw-in with leadout conn = 5

### Gate handle anchor



Innovative Gallagher design. Anchor to attach a gate handle to steel posts. Stronger than all other gate handle anchors thanks to the new technique. Made of high quality materials.



**060658** Bolt-on with leadout conn = 5

### Gate handle anchor



For connecting a gate handle, with galvanized joining plate. We recommend the use of wire clamp (part no. 010851) to guarantee an optimum connection.



**010905** 2-way / screw-in = 4

### Gate handle anchor



For connecting a gate handle.



**010738** 2-way / screw-in / basic = 4

### Gate handle anchor



Gate anchor with 3 anchor points for Gallagher gate handles, ideal in multi-paddock situations. Power connects to bolt from below the plate. Comes with the 3mm galvanized plate.



**021451** 3-way / screw-on with leadout conn = 4

[www.gallagher.eu](http://www.gallagher.eu)





Gallagher has wide range of netting for ideal and reliable portable/moveable fencing. Whether you need netting for sheep, chickens, rabbits, cats, dogs or goats, we've got it. We would also like to introduce you to our ideal fencing for sheep and cattle. The SmartFence 2.0 is our pride and joy - the perfect alternative to standard fencing netting.




#### Netting key

We have a wide range of netting. Please use the key to find the right netting for you. It enables you to find the specifications of the netting.

For example:

Orange 90 / 1 W 14 / G 50 m




- 1 the colour of the netting
- 2 the height of the netting (cm)
- 3 1 = single pin  
2 = double pin
- 4 with a reinforced bottom wire
- 5 the number of posts
- 6 the colour of the posts: G=green / W=white / B=black
- 7 length of netting

#### EuroNetz Sheep netting



Complete and easy to use portable netting for sheep and lambs. If the pasture is bordered with ditches, netting offers even the newborn lambs maximum safety. Length: 50m. It is easy to connect nets together.

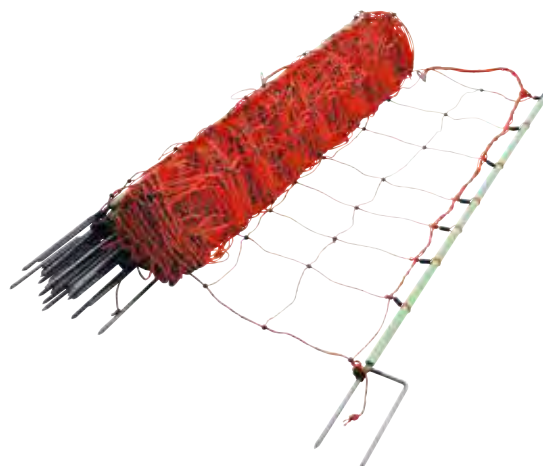

022175	EuroNetz Sheep netting, Orange 90/2-14/G-50m	🔗 = 1
075768	EuroNetz Sheep netting, Orange 90/2W14/G-50m	🔗 = 1
075386	EuroNetz Sheep netting, Orange 90/2-14/W-50m	🔗 = 1




## EuroNetz Gate for electric netting



A gate set for convenient opening or closing of net fencing.  
Easy to use and to connect to your net fencing.

<b>079360</b>	Entry gate (120x100cm)	= 1
---------------	------------------------	-----



## EuroNetz Sheep netting



Complete and user-friendly portable fencing netting for sheep and lambs. Also suitable as fencing near ditches so new-born lambs can stay in the pasture in complete safety. Length: 50m. Includes 14 posts with a single pin that are incorporated into the netting. Several nets are easy to connect together.

<b>075379</b>	EuroNetz Sheep netting, Orange 90/1-14/W-50m	= 1
<b>022106</b>	EuroNetz Sheep netting, Orange 90/1-14/G-50m	= 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	= 1



## EuroNetz Goat netting



Complete and easy to use portable netting for goats and lambs. If the pasture is bordered with ditches, netting offers even the newborn lambs maximum safety. Length: 50m. It is easy to connect nets together.

<b>022212</b>	EuroNetz Goat netting, Orange 105/2-14/G-50m	= 1
<b>022168</b>	EuroNetz Goat netting, Orange 105/1-14/G-50m	= 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	= 1



## EuroNetz Rabbit netting/Hobby netting



Fencing netting for rabbits and other small pets. Can also be used for an allotment or a field. Complete and easy to attach to several other nets. Length 25m, 9 posts.

<b>077281</b>	EuroNetz Rabbit-/hobby netting, Green 65/1-9/B-25m	= 1
<b>022182</b>	EuroNetz Rabbit-/hobby netting, Orange 65/1-15/G-50m	= 1
<b>024377</b>	EuroNetz Rabbit-/hobby netting, Green 65/1-15/B-50m	= 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	= 1






## EuroNetz Poultry netting



A poultry net is the ideal solution if you frequently need to move your chicken fence. It is user friendly and complete. It has a total length of 50m. Includes 15 single or double spike posts that are mounted in the net. It is easy to connect nets together.

022403	EuroNetz Poultry netting, Orange 112/2-15/G-50m	☼ = 1
076833	EuroNetz Poultry netting, Green 112/2-15/B-50m	☼ = 1
077298	EuroNetz Poultry netting, Green 112/1-9/B-25m	☼ = 1
022229	EuroNetz Poultry netting, Orange 112/1-15/G-50m	☼ = 1
075867	EuroNetz Poultry netting, Green 112/1-15/B-50m	☼ = 1
079360	Entry gate for EuroNetz electric netting (120x100cm)	☼ = 1

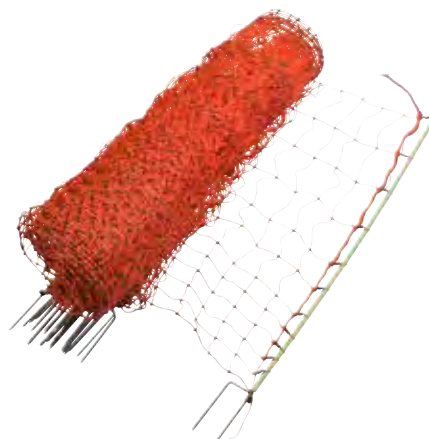


## Wolf netting, Blue



Protect your animals against wolves with this compact wolf netting. Post length is 1,20m and easy to handle. The netting has a 25mm top insulator for possibly adding blue signal tape. The netting is easy to connect together. With an extra reinforced, non-conductive bottom wire.

083039	Blue 120/1W14/B-50m	☼ = 1
--------	---------------------	-------



## EuroNetz Wolf netting



Complete and user-friendly fencing netting to keep out wolves. The netting is 50m long and is 1.20m high. It has 14 posts with a double pin and a reinforced bottom wire to prevent it from being breached by gnawing or chewing. The netting is easy to erect and several nets can be linked together.

078677	Orange 120/2W14/G-50m	☼ = 1
--------	-----------------------	-------




## EuroNetz Wolf netting



Fencing netting to protect your animals against wolves, with a plus/ min connection. This means that the wires are connected alternately to the plus and minus pole of the energizer. If 2 wires are touched at the same time, the animal experiences a strong, brief shock. This system guarantees full voltage, even on surfaces where earthing is tricky. The netting has 14 posts with a double pin, it is 1.20m high, 50m long and extremely easy to use.

078684	Orange 120/2W14/G-50m	☼ = 1
--------	-----------------------	-------

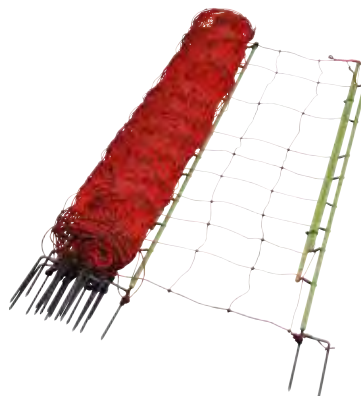



## EuroNetz Wild boar netting



Turbo netting against wild boars. Strong posts 19mm, best solution to prevent wild boars destroying your crops. An electric fence in combination with a budget physical barrier.




<b>062973</b>	EuroNetz Wild boar netting, White 75/1-14/W-50m	☼ = 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	☼ = 1

## EuroNetz Turbo netting



Strong, high quality Turbo netting. With a stranded cord, which reinforces the top wire by 80%, for greater conductivity.



<b>025473</b>	White 90/2-14/W-50m	☼ = 1
<b>010493</b>	EuroNetz Turbo netting, White 90/1-14/W-50m	☼ = 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	☼ = 1

## EuroNetz Combo netting



This netting is extremely suitable for uneven terrain with sheep and goats. The netting is 50m long. The plastic reinforcement of the vertical wires, every 30cm, ensures this netting is always tight. The netting includes 14 posts with double pin, which have been incorporated into the netting.

<b>075584</b>	EuroNetz Combo netting, Orange 90/2-14/G-50m	☼ = 1
<b>075546</b>	EuroNetz Combo netting, Orange 90/2W14/G-50m	☼ = 1
<b>075539</b>	EuroNetz Combo netting, Orange 105/2W14/G-50m	☼ = 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	☼ = 1




## EuroNetz Combo netting



Combo netting: the netting with extra stability for use on rocky territory. Every 30cm the vertical wires are reinforced, resulting in a tighter net in rough terrain.

<b>072415</b>	EuroNetz Combo netting, Orange 105/1W14/G-50m	☼ = 1
<b>010356</b>	EuroNetz Combo netting, Orange 90/1-14/G-50m	☼ = 1
<b>079360</b>	Entry gate for EuroNetz electric netting (120x100cm)	☼ = 1

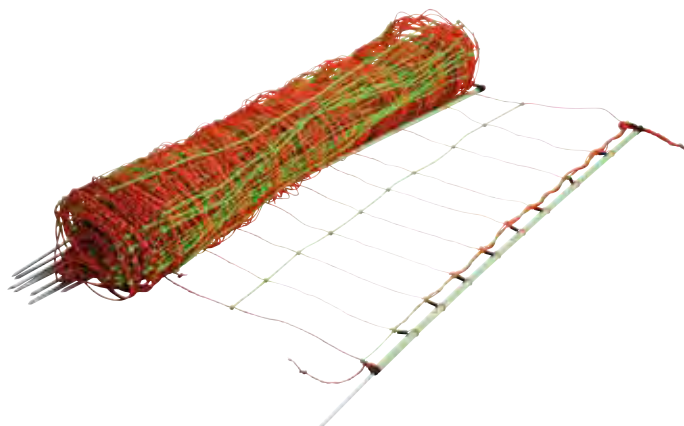



## SmartFence 2.0



SmartFence 2.0 is the alternative product for netting. A revolution design where posts, reels and wires are combined into 1 product. Quick and easy to put up.

<b>700007</b>	SmartFence 2.0	= 1
<b>700045</b>	SmartFence 2.0 4Pack	= 4
<b>069750</b>	PowerLine wire 3mm 100m	= 1
<b>069767</b>	TurboLine wire 3mm 100m	= 1
<b>065264</b>	Battery drill adapter	= 1

## EuroNetz repair set

Repair Set Euro Netting



<b>22104</b>	Repair set Euro/Combo netting	= 1
<b>074747</b>	EuroNetz Repair Set Turbo netting	= 1

## Garden kit 80cm



An ideal set for keeping pets out of your own garden or for keeping your neighbours' pets out. The M35 is a compact, but powerful mains energizer.



<b>083091</b>	Garden kit 80cm with M35 230V	= 1
<b>083107</b>	Garden kit 50cm M35 230V	= 1

## Starter kit M10 230V



The ideal basic set for effective fencing for pet and other applications around your house and in your garden. The starter kit contains the most important elements for electric fencing for keeping your dogs and cats out your garden and flower beds.



<b>083114</b>	Starter kit M10 230V	= 1
---------------	----------------------	-----

## Pet kit 80cm S6 Solar



This set works with an energizer (S6) on solar power. A mains connection is not required, and the energizer can be put in any required place in the garden or on the campsite. This set consists of: S6, 100 m plastic wire, 4 wire connectors, 10 fencing posts of 80 cm, 40 wire clips, 8 screw insulators, 1 connection set, 1 earth peg and 1 warning sign.



<b>084197</b>	Pet kit 80cm S6 Solar	= 1
---------------	-----------------------	-----



## Cat kit for fence



This fencing kit is easy to install and extremely effective in use. It means the neighbours' cat can no longer enter your garden. The M10 is a mains energizer.



**083121** Cat kit for fence with M10 = 1

## Marten kit



Basic set for keeping martens off your land. With good electric fencing you reduce the chance of martens causing damage to your house or other property. This set contains insulators that can be installed on the down pipe.



**083138** Marten kit with M50 230V = 1

**083923** Gutter clamp insulator Marten Kit (5) = 5

**083916** Rainpipe clamp Insulator Marten Kit (1) = 1

## Heron kit M10



A basic system for a fence around your pond. Through this safe, highly effective fence system your pond is a prohibited area for herons, prevents them from eating fish from your pond. The system includes an energizer with wall clip, 10 border posts, 20 clips, 100 meters of black plastic wire and connecting wire. The material is suitable for a 2-wire fence with a total length of 50 meters.



**021727** 230V Heron kit M10 = 1

**021789** Extension wire Heron kit black 100m = 1

## Poultry kit B60



A complete kit for setting up 50 metres of electric netting 44" (112cm) to keep your poultry in and protect them against predators. Installing is made easy due to a step by step manual. The kit includes: B60 (12V), Poultry netting; double spike, 112cm (50m), Earth peg, Warning sign.



**072309** 12V Poultry kit B60 = 1

## FoxlightS



The way to protect your venerable animals against attacks from foxes and other night predators. 9 LED bulbs blink randomly so that the illusion is created for predators that someone is patrolling the area. 6 Volt battery is not included.



**061716** FoxlightS = 1

**002169** 6V Battery for FoxlightS = 1

## SnailFence kit M10



Gallaghers "Out of the Box" solution: to keep out the neighbour's Cat. to keep Pine Martens out of the attic, and of course to keep killer snails away from your vegetable garden. Content: 1x Gallagher M10 Energizer, 1x 20 meter Snail Fence tape, 1x Junctionbox, 200x Screw M3x12, 10mtr Fence cable, 1x Mountingkit, 1x Manual.



**075850** 230V SnailFence kit M10 / 20m = 1

**077434** SnailFence tape extension kit 50m = 1

**077427** SnailFence tape extension kit 20m = 1



If you are going to put up electric fencing you simply need the right tools. Whether you need to tension High Tensile fencing, cut wire, or screw down insulators, the job is simple when you use Gallagher tools.



### Gallagher pliers



Gallagher pliers: These pliers are suitable for all types of fencing wire. High quality and durable. Minimum wire damage. Cuts high tensile wire.



005225 Gallagher pliers

☞ = 1

### Farmer pliers



Farmer pliers: indispensable fence pliers for cutting wire or removing staples. Can also be used as a hammer.



004140 Farmer pliers

☞ = 1

### Wire twister



With this wire twister, you can twist the wire clips around a wire without a problem. Ideal for use with Insultimber/Ecopost fences.



005232 Wire twister

☞ = 1

### Drill chuck Pro




Support to easy mount almost the entire range of Gallagher ring and screw insulators with your battery drill. (Not suitable for 057801, 057818 and 009350)



077397 Drill chuck Pro

☞ = 1

### Drill chuck Basic



Support to easy mount almost the entire range of Gallagher ring and screw insulators with your battery drill. (Not suitable for 057801, 057818, 009350 and Screw-in Insulator Super)



053933 Drill chuck Basic

☞ = 1

### Gallagher Screws

Self drilling torx screws 4,5x40 with cylinder head. The special red wax layer makes pre-drilling unnecessary. T25 Screw bit included.



050000 4,5x40 T25 (200)

☞ = 200



## Wire dispenser



Ideal for running out or winding up all types of wire. Fully galvanized for long life. Easy to use.



**011018** For fencing wire

☞ = 1

## Post holer 100mm



Low cost and easy to use tool for installing soft wood posts. Using the postholer makes fencing easy and prevents the post from getting damaged when using a sledge hammer. Two diameters.



**704668** For 100mm posts

☞ = 1

## Post holer 75mm



Low cost and easy to use tool for installing soft wood posts. Using the postholer makes fencing easy and prevents the post from getting damaged when using a sledge hammer. Two diameters.



**704644** For 75mm posts

☞ = 1

## Sledge hammer



Indispensable for driving Eco posts to correct depths without damaging posts. Prevents posts from standing out of line.



**017614** Sledge hammer

☞ = 1

## Rammer



Indispensable for driving Insultimber posts to correct depths without damaging posts. Prevents posts from standing out of line.



**035311** For Insultimber posts

☞ = 1

## Rammer



Indispensable for driving Eco posts to correct depths without damaging posts. Prevents posts from standing out of line.



**017652** For Eco posts

☞ = 1

## Rammer



Special rammer for convenient hammering in of a Gallagher Line post.



**525013** Line Post Rammer

☞ = 1

## Line Post Accessories



Sleeve for Line Post rammer 1350mm and 1500mm.



**530031** Line Post Rammer sleeve

☞ = 1

## Line Post Accessories



Line Post Auger to easily place Gallagher Line Posts in hard ground. Handy tool designed specifically for the Gallagher Line Post.



**540016** Line Post Pilot

☞ = 1

## Universal post Lifter



Post Lifter, suitable for the Line Post lifter adapter To easily pull out the Gallagher Line Post.



**527000** Universal Post Lifter

☞ = 1



## Line Post Accessories

2

Line Post Lifter to easily pull out the Gallagher Line Post. Handy tool designed specifically for the Gallagher Line Post. To be used together with the universal post lifter (art. no 527000)



527017 Line Post Lifter Adapter

☞ = 1

## Wire tensioner

☞ = 2

Tool for installing ratchet tensioners in fencing.



029044 Wire tensioner basic

☞ = 1

## Wire tensioner

☞ = 2

An essential tool for use with Permanent Wire Tightener. Fast and easy to use, even in confined areas. One way bearing allows ratchet action of the handle.



006451 Wire tensioner pro

☞ = 1

## Screw-in Tie Down

The Screw-in Tie Down anchors the Line Post to the ground in surfaces with hills and hollows. Fast and easy to install, using the handle for the screw in tie down. (SKU:006161)



106151 Screw-in Tie Down

☞ = 5

## Tie Down Handle

This handle is needed when installing a Screw-in Tie Down (SKU:106151) Easy to use and can be removed and re-used after the tie-down is screwed into the ground.



006161 Handle for Screw-in Tie Down

☞ = 1







## H-Trap



Control horseflies without chemicals. Neither animals, such as horses or cattle, nor people enjoy horseflies. The H-trap reduces the horsefly population to an absolute minimum. Tests have demonstrated that a 90-95% reduction in horseflies can be achieved around an H-trap without using pesticides or electricity.



034014 Horsefly trap / 1,20x1,95m

☞ = 1

## MT-Trap



You need a horsefly trap to stop horseflies and wasps and this horsefly trap ensures that 95% of horseflies is captured. The MultiTrap, a portable horsefly trap, also known as the MT-trap, has been designed to eradicate horseflies and wasps.



000441 Horsefly and Wasps trap / 40x50cm

☞ = 1

## Horse-Fly Magnet



The horsefly magnet is the entry model for dealing with wasps and horseflies. The horsefly trap is suitable for a plot with 5 horses or a paddock of maximum 10,000m<sup>2</sup>.



000861 Horsefly trap 1,20x1,95m

☞ = 1



Electric fencing, most people assume that it is only used to keep cows, sheep or horses in a field. But did you know that it is also a perfect way of keeping wild animals out?

More and more often, we help our customers find solutions to protect field birds, poultry, sheep and crops, for example. Electric fencing is used to protect against attacks from foxes or wolves. But it can also combat damage to crops caused by wild boar and deer. They can all cause massive damage, which is why we recommend you protect your property. We will be pleased to help you find the perfect solution.

The type of fencing you choose depends on the animal causing the problems and whether this is all year round or only during a certain season. On this page, we'd like to inform you about how to keep foxes out. Check out [www.gallagher.eu](http://www.gallagher.eu) for many other solutions to help prevent visits from wolves, wild boar, deer and weasel-like animals. Is your problem not featured here? Don't hesitate to contact us. Our fencing specialists are pleased to assist!

**Tip:** By adding a FoxlightS, wild animals are startled by beams of light in the dark, that are produced in a random pattern. The Foxlight gives the impression that there are people present. The wild animals will then stop exploring the area.



p. 75



Did you know that you can download white papers from [gallagher.eu](http://gallagher.eu), with all information on how to keep wild animals out?






Foxes are smart animals. Once they have set their sights on something, they will do everything they can to get it. When it comes to electric fencing therefore, we would always opt for a double fence. If the fox manages to get under the outer fencing, he will still quite literally come up against the inner

fence. We offer both temporary solutions and permanent solutions to keep foxes out. We'll be pleased to explain both solutions.

## Mobile solutions

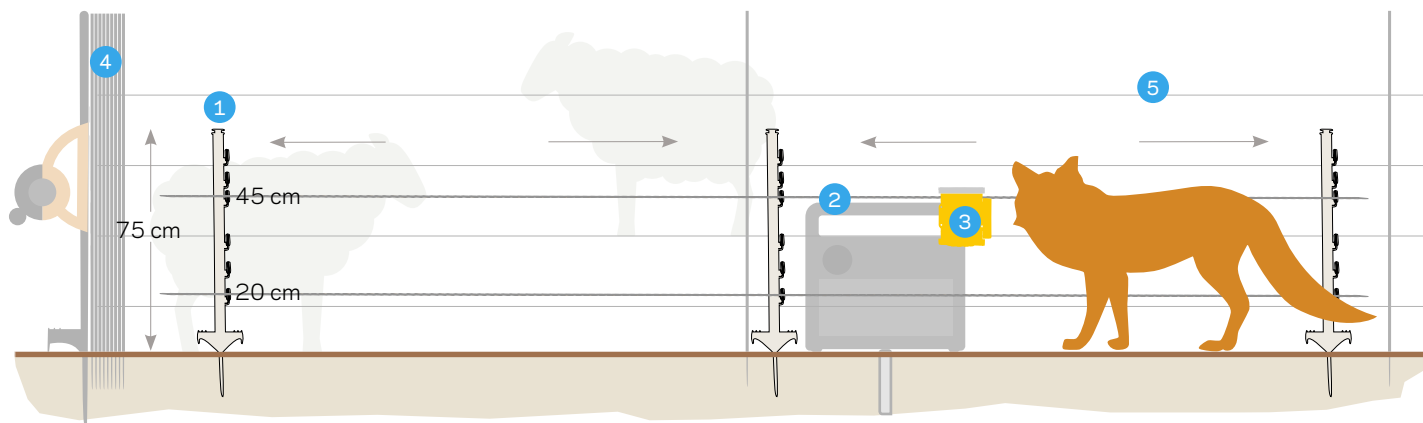

### Outer fencing


Distance between inner/outer fence = 35 cm

- |   |  |        |
|---|--|--------|
| 1 | <b>057849</b> Hobby post white 0,75m (10)          | ☞ = 10 |
| 2 | <b>011247</b> Vidoflex 9 TurboLine Plus White 200m | ☞ = 1  |
| 3 | <b>061716</b> FoxlightS                            | ☞ = 1  |

### Inner fencing

- |    |   |       |
|----|---|-------|
| 4  | <b>700007</b> SmartFence 2.0                                  | ☞ = 1 |
| or |   |       |
|    | <b>022403</b> EuroNetz Poultry netting, Orange 112/2-15/G-50m | ☞ = 1 |

## Permanent solution

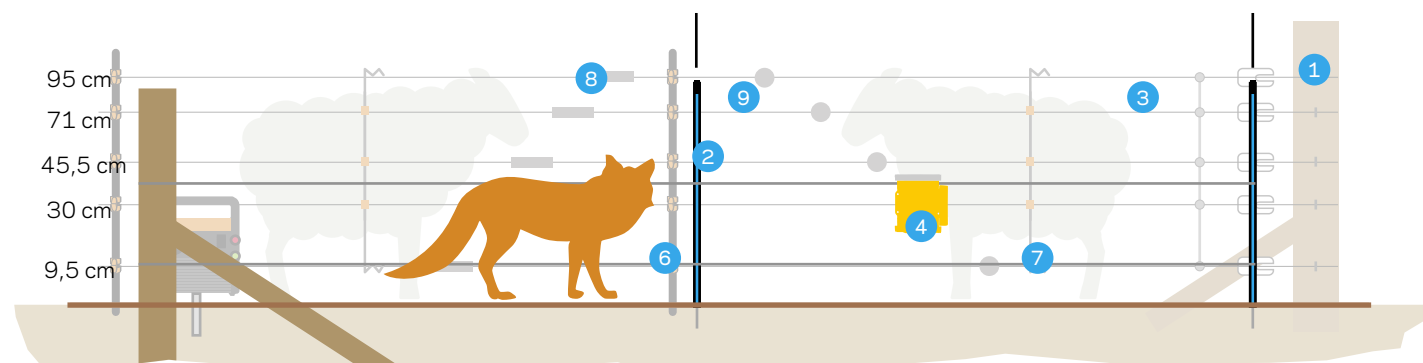

### Outer fencing

- |   |  |        |
|---|--|--------|
| 1 | <b>017898</b> Insultimber (FSC®) Strainer post 200x8x8cm (1) | ☞ = 1  |
|   | <b>017997</b> Insultimber (FSC®) Strut 200x4x8cm (1)         | ☞ = 1  |
| 2 | <b>024391</b> Plastic post blue 13mm 0,70m (10)              | ☞ = 10 |
| 3 | <b>039999</b> HT zinc-alu-mag wire 2,5mm - 25kg - 625m       | ☞ = 1  |
| 4 | <b>061716</b> FoxlightS                                      | ☞ = 1  |

### Inner fencing

- |   |   |        |
|---|---|--------|
| 5 | <b>9017904</b> Insultimber (FSC®) Strainer post 250x10x10cm (10x1)    | ☞ = 10 |
| 6 | <b>742014</b> Gallagher Insulated Line Post 1,40m (4)                 | ☞ = 4  |
| 7 | <b>717135</b> Gallagher Insulated Line Post Dropper 0,95m 5 wire (10) | ☞ = 10 |
|   | <b>744346</b> Wire clip insulator for Gallagher Line Post (20)        | ☞ = 20 |
| 3 | <b>039999</b> HT zinc-alu-mag wire 2,5mm - 25kg - 625m                | ☞ = 1  |
| 8 | <b>036257</b> For HT/EQ ø2,5mm/2,65mm                                 | ☞ = 1  |
| 9 | <b>010882</b> Wire tensioner  | ☞ = 3  |
|   | <b>010868</b> Joint clamp angle with wingnut (10)                     | ☞ = 10 |
|   | <b>011032</b> Strain insulator reinforced white (5)                   | ☞ = 5  |






When requiring effective and permanent fencing, you choose hardware in materials that will last for many years. It is therefore also essential that your permanent fencing is installed properly. We would therefore like to give a general guide on how best to construct a permanent fence.

**For more detailed information, please check [www.gallagher.eu](http://www.gallagher.eu).**



*'I worked together with my neighbour to install fencing for my horses. Yes, it was certainly quite a job. But thanks to the step-by-step installation plan provided by Gallagher, we knew exactly what to do. And it was actually quicker than we had expected. Those Gallagher Line Posts, they certainly make the job a lot easier! In the time it would have taken to get 3 wooden posts in the ground, we now installed 30 line posts! Brilliant!'*




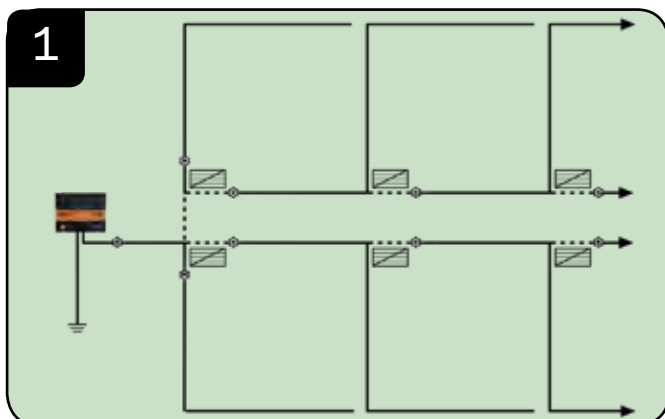

1 Draw a ground plan



2 Determine the required wire height  
(see page 84)

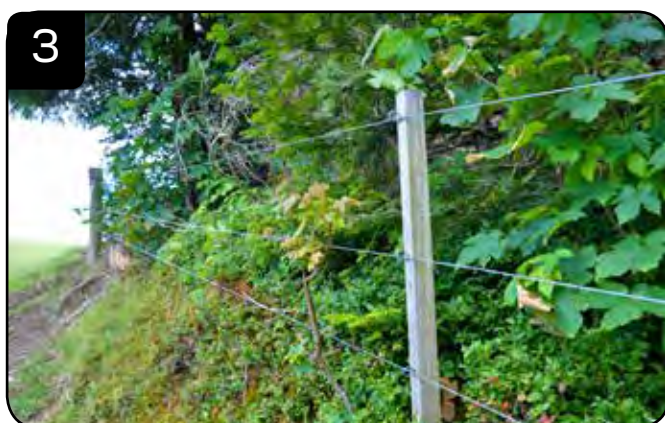

3 First fit the corner posts



4 Fit the intermediate posts



5 Fit and tension the fencing




6 Install the energizer and earthing


Use the Line Posts in combination with the droppers. That's an even quicker and more affordable solution.  
Go to [www.gallagher.eu/insulated-line-post](http://www.gallagher.eu/insulated-line-post) for more information or scan the QR code.






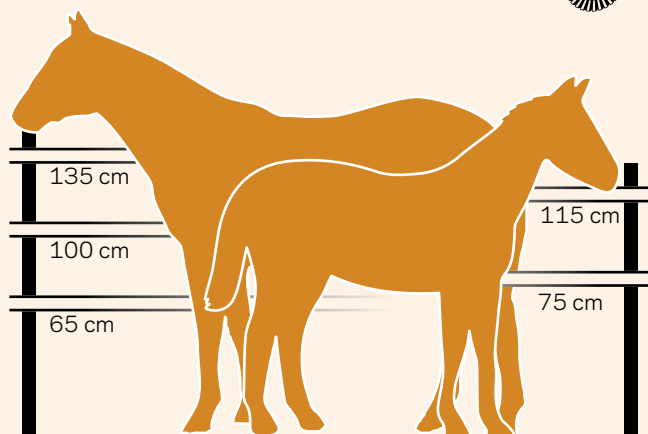


Horses

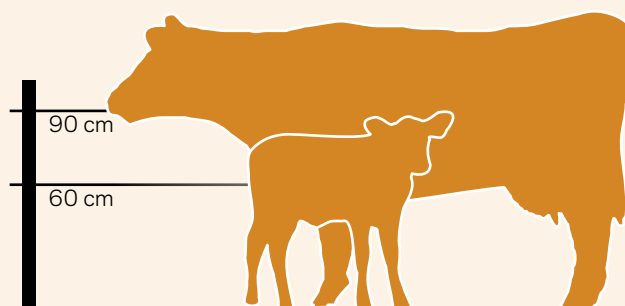


Cows with calves

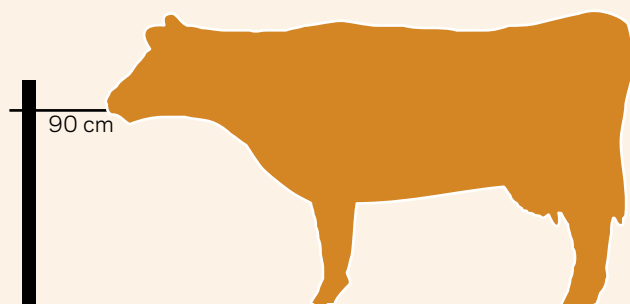


Cows without calves

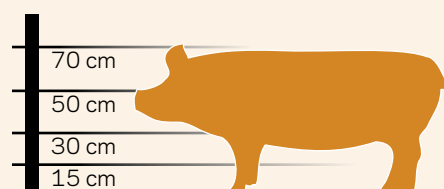

Pigs

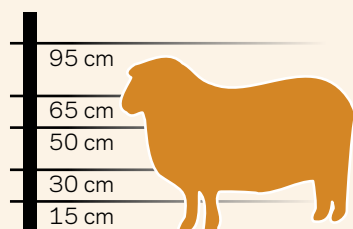


Sheep

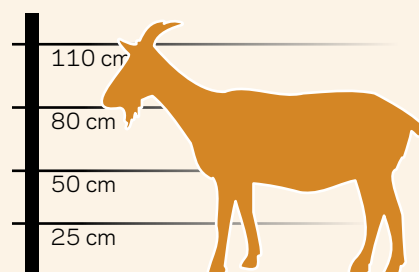


Goats




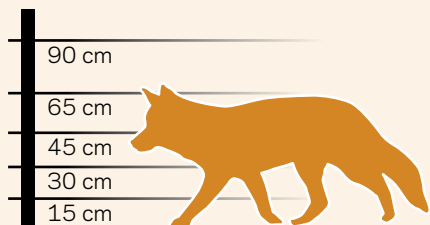


Foxes

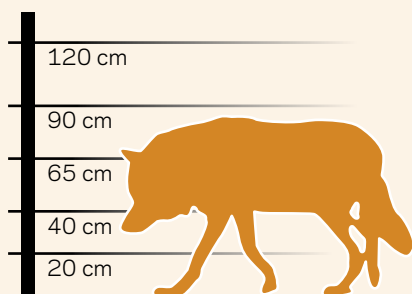


Wolves

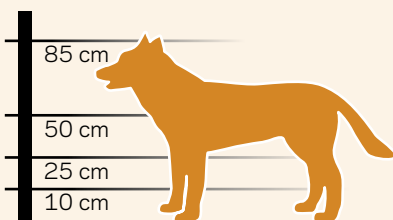


Large dogs

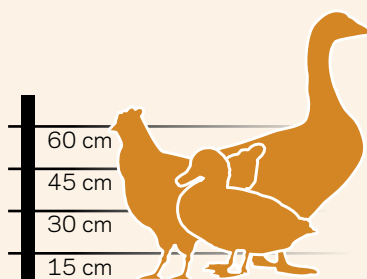

Poultry

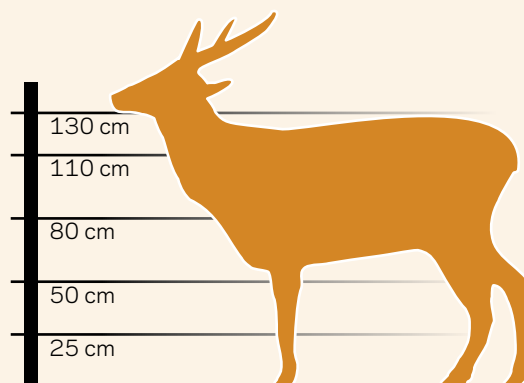

Deer

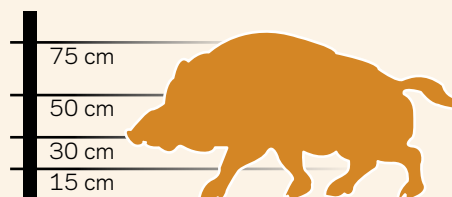

Wild boar



Small dogs



Rabbits



# Do the Gallagher Check!

As an animal lover, you want to be certain that your animals stay safely in their field, and you do not want breakouts. It is therefore essential to check your fencing in order to be certain that it's working optimally. Spring is the perfect time to check the fencing, for a fresh new start of the grazing season.



## Handy testers for the Gallagher Check



p. 41

Neon tester



p. 41


Fault finder for electric fencing



p. 41


Digital voltmeter

All the steps are of course explained in detail in the Gallagher Check video. Go to [www.gallagher.eu/check](http://www.gallagher.eu/check) for more information or scan the QR code.







## STEP 1 CHECK YOUR ENERGIZER

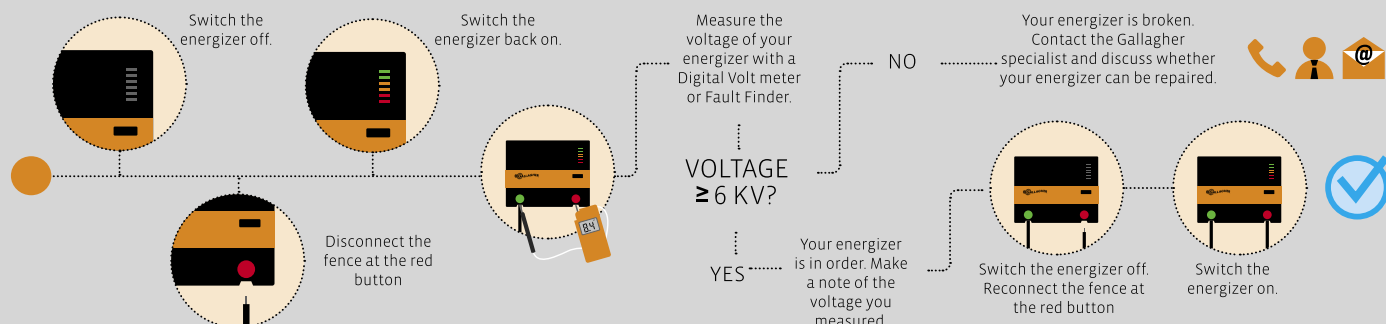


## STEP 2 CHECK THE VOLTAGE ON YOUR FENCING

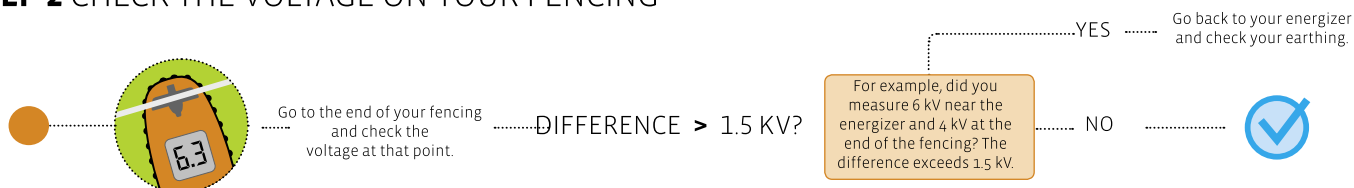

## STEP 3 CHECK YOUR FENCING

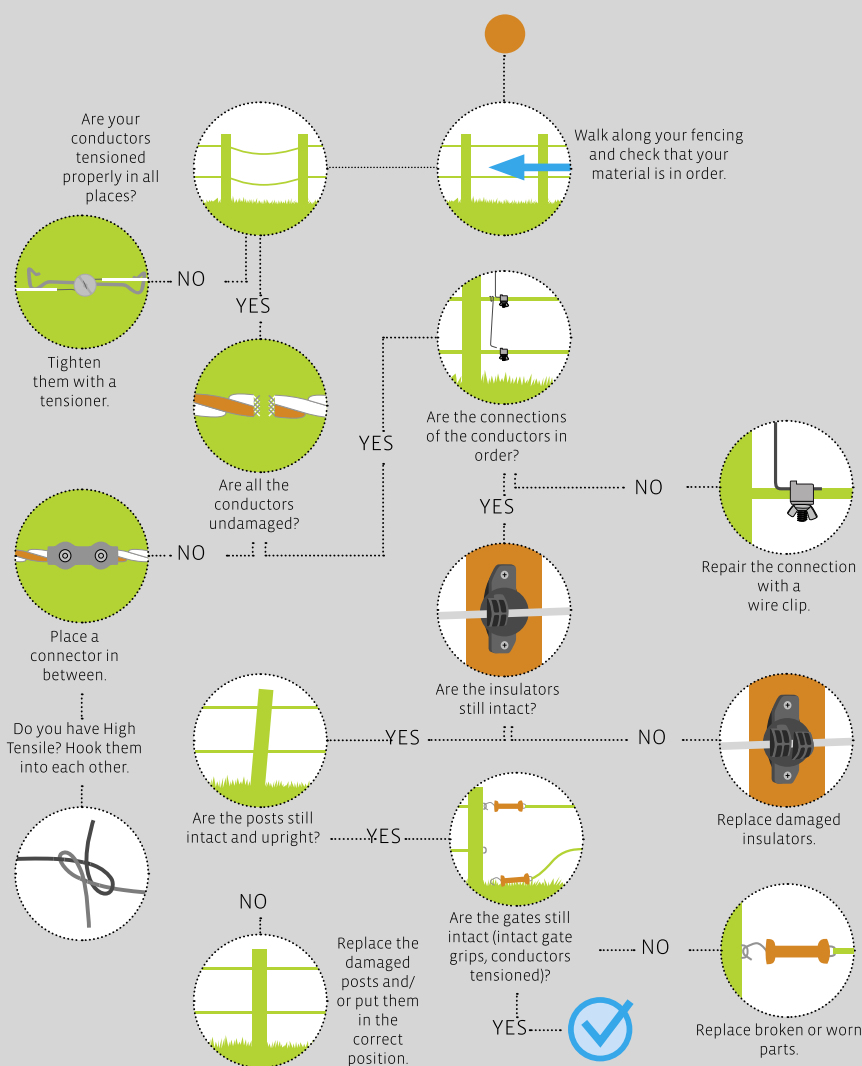

## STEP 4 CHECK YOUR EARTHING

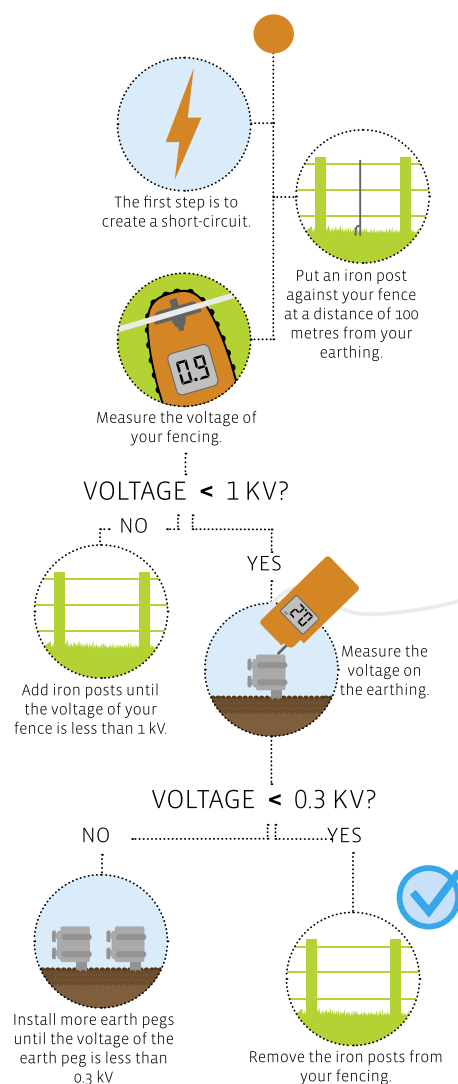



## Weighing and EID systems

With more than 80 years' experience in the agricultural industry and a reputation for trendsetting innovations, Gallagher is ahead of the field when it comes to Weighing and EID solutions – offering a complete range of equipment for weighing animals, gathering data, and EID systems.



### **“IMPROVED operating results with efficient animal management Are you looking for improvement opportunities in your company?”**

“Gallagher is able to assist. An investment in a weighing system pays for itself in various ways. Weighing animals provides insight into the growth performance of the entire herd, but also at individual level. It is also possible to manage feed and medication costs more efficiently. Furthermore, you know exactly which animal has the highest yield at any time.”

### **How does it work?**

There are various ways to start weighing and/or identification. For example, you can weigh animals without identification; you need scales, loadbars and a platform/box. If you wish to measure groups and individual animal performances, you will need to use electronic ear tags. These ear tags can be scanned with a fixed antenna panel or with a portable EID reader (HR5 or HR4). By reading the ear tag, an ear number can be linked to the weight and individual data become clear.



If you are interested in how that works, take a look at the video here.





# NEW SCALES W-0

AVAILABLE FROM SPRING 2021

"Gallagher has provided hardware and software for efficient animal management for many years. This year we are proud to introduce a new digital entry model, the Gallagher W-0. The W-0 is the perfect entry model to start measuring animal performance. It makes digital and accurate weighing available and affordable to everyone, you know exactly when the animal produces its highest yield."



025001 Weigh scale W0

☞ = 1

## MANAGE THE DATA IN THE CLOUD WITH THE GALLAGHER ANIMAL PERFORMANCE MANAGEMENT SOFTWARE

The new Gallagher Animal Performance management software makes it possible to have the data on the herd at anytime and anywhere. You can make FREE use of the Gallagher Animal Performance management environment! It is possible to log into your own account on the scales, smartphone or a computer. The devices communicate with each other through Wi-Fi to make sure every device has the correct data. Its design and user-friendliness make it accessible to any user.





## Weigh scale TW-1 and TWR-1

The most intuitive EID-compatible scales in the market. With its touch screen and user-friendly interface, the TW-1 is easy to operate. Measure and manage weight increase in your animals to achieve maximum returns on your farm. With the alphanumerical keyboard you can add tag information and notes. The on-board instructions mean that help is always available, wherever you are with your TW-1.

The robust design makes the TW-1 farm-proof, resistant to dents, scratches and extreme weather conditions. Supplied with a convenient Gallagher carry bag, fitting bracket, charging cable and USB and APS software.



With on-board instructions to offer help 24 hours per day and 7 days per week

Take notes on animals, and receive alerts

Trendsetting touchscreen technology

026022	TWR-1 Weigh Scale with Data collector	☞ = 1
026015	TW-1 Weigh Scale	☞ = 1

## Weigh scale TW-3

The TW-3 is a powerful weight scale, able to record weighing data and animal statistics. It makes the device suitable for users who are looking for more than just the weight.

The scales enable the user to record up to 3 animal traits (sex, breed, etc.), activities or life data per session. Sort your animals on the basis of weight, animal characteristics or activities. The on-board instructions mean you can access help anywhere and anytime. The robust design makes the TW-3 farm-proof, resistant to dents, scratches and extreme weather conditions.



Sturdy and robust casing

Easy to operate

Has a touch screen

026039	TW-3 Weigh Scale with Data collector	☞ = 1
--------	--------------------------------------	-------

## Weigh scale TWR-5

The revolutionary TWR-5 make the complete range of weighing and EID systems quicker and simpler than ever.

These systems are the first on the market to have an integrated EID reader, to simplify the weighing process and gathering of animal data.



EID  
BUILT-IN TAG  
READER

260600	TWR-5 Weigh Scale with Data collector, reader	☞ = 1
--------	---	-------



## Heavy Duty Loadbar set



5000kg weighing capacity. Length 1000mm. Tough rugged steel loadbars. Slotted top mounting holes fit all sizes of platforms and crushes. 6 metre long, tough polyurethane loadbar cables. Fully water proof. No rubber mounts.



**028672** Heavy Duty Loadbar set 5000kg - 1000mm = 1

## Loadbar set



2500kg weighing capacity. Length 1000mm. Tough rugged steel loadbars. Slotted top mounting holes fit all sizes of platforms and crushes. 6 metre long, tough polyurethane loadbar cables. Fully water proof. No rubber mounts.



**028665** Loadbar set 2500kg - 1000mm = 1

## Loadbar set




2500kg weighing capacity. Length 600mm. Tough rugged steel loadbars. Slotted top mounting holes fit all sizes of platforms and crushes. 6 metre long, tough polyurethane loadbar cables. Fully water proof. No rubber mounts.



**028610** Loadbar set 2500kg - 600mm = 1

## Loadbar set

Lightweight design that fits under most livestock platforms. Sustainable galvanised steel frame.



**065007** Loadbar set 1500kg - 580mm = 1

## SmartReader HR5

Portable Hand Held EID Tag Reader and data collection. High performance readers provide a super-fast read of both HDX and FDX-B tags, and with an ergonomic and hard wearing design they are the perfect tool for portable EID data collection. With its large colour screen and alpha numeric keypad, the HR5 is the most powerful portable data collection and editing platform available providing flexibility right there in the yard. Farmers can record, edit and customise data against EID records immediately without needing to set it up in the office first.

**033037** SmartReader HR5 = 1

## SmartReader HR4

Portable Hand Held EID Tag Reader and data collection. High performance readers provide a super-fast read of both HDX and FDX-B tags, and with an ergonomic and hard wearing design they are the perfect tool for portable EID data collection. Easy recording of pre-defined animal data against EID tag numbers.

**068944** SmartReader HR4 = 1

Fast and continuous reading with a single click of the trigger.

LED, vibration and beeper indicate that a tag has been scanned.

Confirms to ISO half and full duplex.

Market leader, ergonomic design with long-lasting charge and hand protection for maximum user safety.





## Birth Alarm is a birth-alert system and monitors the horse's health



### Birth Alarm for monitoring health.

Always know what is going on with your horse. Now you can with Birth Alarm's solutions. A number of Birth Alarm's products have a 'monitoring setting'. Generally, a horse will not lie down for a long period of time. If the owner suspects that the horse has a health issue, a Birth Alarm can be attached to the halter or to the horse's antiroll girth. When the horse lies down, the owner receives an alert, and he or she can take action immediately.

### Birth Alarm Advanced

The Birth Alarm Advanced is the latest development in the Birth Alarm range.

The system is easy to install and easy to expand to max. 4 mares. The touchscreen colour display dims automatically at night. Suitable for mares that sleep lying fully flat and has the functionality to monitor the health of your horse.





## Birth Alarm Premium

The system for ultimate control and comprehensive options. Contains a unique sleep mode especially designed for mares that sleep fully flat. Option to connect to 4 mobile phones. Including the option to retrieve status messages. The transmitter can be fitted in the anti-roll girth or on the halter, depending on the preference of the mare.



084548 Birth Alarm Premium

📶 = 1

## Birth Alarm Lite 2.0

The entry-level model of the Birth Alarm range. Easy to install, a system in which the transmitter sends a timely alert to a maximum of two connected mobile phones. The transmitter can be fitted in the anti-roll girth or on the halter, depending on the preference of the mare. Now with sleep mode!



084555 Birth Alarm Lite 2.0

📶 = 1

## Birth Alarm Classic

2

The Birth Alarm Classic has proven its worth in recent years as a highly reliable birth alarm system for mares. The system consists of a transmitter, a fixed receiver and an assembly kit. This system can be used for mares that sleep fully flat. It can also be used to monitor the health of the horse (colic mode).



510 Birth Alarm Classic

📶 = 1

511 Birth Alarm Classic, incl. Anti roll girth

📶 = 1

## Birth Alarm Classic

2

The Birth Alarm Mobile works with a transmitter and the mobile phone as a receiver. Two different phones can serve as receivers. The transmitter must be fitted in an anti-roll girth. This transmitter contains a unique sleep mode especially designed for mares that sleep fully flat.



025480 Mobile

📶 = 1

027934 Mobile incl. Anti roll girth

📶 = 1

# NEW: BIRTH ALARM CAMERA SYSTEMS



You may want to see what is going on in the stables or in the paddock at any time of the day. Therefore, Birth Alarm produced two camera systems that provide you with even more monitoring and overview. In combination with the other Birth Alarm products, these cameras provide optimum monitoring.

000655 PoE camera

📶 = 1

054628 Wifi camera

📶 = 1

## Birth Alarm Mobile + WiFi Camera

The Birth Alarm Mobile, now available in combination with the Foscam WiFi camera! A very attractive combination to monitor the mare as closely as possible during the birth of the foal. The Birth Alarm Mobile triggers an alarm, after which the combination with the camera provides the ideal solution.

084654 Birth Alarm Mobile + WiFi Camera

📶 = 1




**PROMOTION**

**WHILST STOCKS LAST!**



## Specifications of 230V energizers

	M35	M50	M120	M160	M350	M550	M650	M950	M1400
									
Part No.	383361	038332	033333	384306	323305	323312	323329	324302	324319
Output Voltage (V)	5400	6200	7000	7700	8700	9200	9200	7700	7700
Voltage with 500 Ohm (V)	3000	3500	3800	4600	6300	7000	7100	7700	7700
Voltage with 100 Ohm load (V)	900	1100	1300	1600	3200	3500	3600	3800	4300
 Stored energy (Joules)	0,35	0,5	1,2	1,6	3,5	5,5	6,5	9	12
Output energy (Joules)	0,23	0,3	0,65	0,6	2,7	3,9	4,5	6,1	7,7
Multiwire Distance - ideal conditions (km)	2	4	8	9	28	35	40	42	55
Multiwire Distance - light growth (km)	1	2	3	3,5	12	25	28	31	34
Multiwire Distance - recommended (km)	0,5	1	2	2,5	7	9	10	11	14
Grid area (Hectare/Acre)	1/3	2/5	4/10	6/14	14/35	22/55	26/65	38/95	56/140
Current consumption (W)	0,4	0,6	0,9	1,5	6	7	8	11	14
	-	-	▪	▪	▪	▪	▪	▪	▪
	-	-	-	▪	▪	▪	▪	▪	▪
	-	-	-	-	▪	▪	▪	▪	▪
	-	-	-	-	▪	▪	▪	▪	▪
	▪	▪	▪	▪	-	-	-	-	-
Power on/off	▪	▪	▪	▪	▪	▪	▪	▪	▪
Alarm indicator-LED fence voltage	-	-	-	-	-	-	-	-	▪
LED bar chart	-	-	-	-	-	-	-	-	-
12V Battery backup	o	o	o	o	o	o	o	o	o
Adaptive control	-	-	-	-	-	-	-	▪	▪
Delay with load	-	-	-	-	-	-	-	▪	▪
Security with short-circuit	-	-	-	-	-	-	-	▪	▪
Built-in lightning diverter	▪	▪	▪	▪	▪	▪	▪	▪	▪
Recommended number of earth stakes	1x0,5m	1x1m	2x1m	2x1m	3x2m	3x2m	3x2m	4x2m	4x2m
Advised: Bentonite Super Earth Kit (number of buckets)	-	-	-	-	1	1	1	2	2
EU Standard	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A12	EN60335-2-76-A12
Dimensions (lxbxh mm)	145x75x170	145x75x170	145x75x170	145x75x170	180x90x220	180x90x220	180x90x220	268x95x212	268x95x212
Weight (Kg)	0,80	0,83	0,83	1,7	1,5	1,5	1,5	2,8	2,8

▪ Standard / suitable for

o Optional

- Not compatible / not suitable for

\* Use only during Grazing season.








\*\* Automatic



## Specifications of the i Series

M1800i M2800i M5000i



Part No.	304304	306308	379326
Output Voltage (V)	7000	7000	9000
Voltage with 500 Ohm (V)	7000	6400	9000
Voltage with 100 Ohm load (V)	5200	5400	8200
 Stored energy (Joules)	14	21	19
Output energy (Joules)	10	14	15
Multiwire Distance - ideal conditions (km)	65	80	100
Multiwire Distance - light growth (km)	40	50	60
Multiwire Distance - recommended (km)	17	20	26
Grid area (Hectare/Acre)	75/190	120/300	160/400
Current consumption (W)	9/18	11,4/23	11/18
 	▪	▪	▪
 	▪	▪	▪
	▪	▪	▪
	▪	▪	▪
Power on/off	▪	▪	▪
External display	▪	▪	▪
Easy-to-read display power (A)	▪	▪	▪
Easy-to-read display output voltage (Volt)	▪	▪	▪
Easy-to-read display earth voltage (Volt)	▪	▪	▪
Alarm indicator-LED fence voltage	▪	▪	▪
LED bar chart	▪	▪	▪
Sound alarm fence - earth	▪	▪	▪
Terminal reference earth	▪	▪	▪
Connection option external alarm-control unit	o	o	o
12V Battery backup	o	o	o
Adaptive control	▪	▪	▪
Full-Half Power option	▪	▪	▪
Delay with load	▪	▪	▪
Security with short-circuit	▪	▪	▪
SMS capable	o	o	o
Remote Control	o	o	o
Built-in lightning diverter	▪	▪	▪
Recommended number of earth stakes	5x2m	6x2m	8x2m
EU Standard	EN60335-2-76-A12	EN60335-2-76-A12	EN60335-2-76-A12
Dimensions (lxbxh mm)	345x95 x 225	345x95 x 225	430x140 x 310
Weight (Kg)	4,2	5,6	8,8

## Multi Power i Series

MBS1800i MBS2800i







Part No.	315317	315331
Output Voltage (V)	7000	7000
Voltage with 500 Ohm (V)	7000	6400
Voltage with 100 Ohm load (V)	5200	5400
 Stored energy (Joules)	14	21
Output energy (Joules)	10	14
Multiwire Distance - ideal conditions (km)	65	80
Multiwire Distance - light growth (km)	40	50
Multiwire Distance - recommended (km)	17	20
Grid area (Hectare/Acre)	75/190	120/300
Current consumption power supply (V/mA)	13	17,7
Current consumption battery (V/mA)	8500	1200
Current consumption safemode (mA)	-	-
 	▪	▪
 	▪	▪
	▪	▪
	▪	▪
Battery Save Mode	▪	▪
Battery LED (indicator)	▪	▪
Power on/off	▪	▪
Built-in lightning diverter	▪	▪
Remote Control	o	o
Auto Power conservation to prevent damage to battery	▪	▪
External display	▪	▪
Easy-to-read display power (A)	▪	▪
Easy-to-read display output voltage (Volt)	▪	▪
Easy-to-read display earth voltage (Volt)	▪	▪
Alarm indicator-LED fence voltage	▪	▪
Half Power Option	▪	▪
Night Save Option	-	-
Normal-Slow pulse	**	**
Random pulse mode	-	-
Sound alarm fence - earth	▪	▪
Terminal reference earth	▪	▪
Connection option external alarm-control unit	o	o
12V Battery backup	o	o
Adaptive control	▪	▪
Full-Half Power option	▪	▪
Delay with load	▪	▪
Security with short-circuit	▪	▪
SMS capable	o	o
Power supply included	▪	▪
Suitable for solarpanel (W)	*2x60W	*2x60W
Recommended power supply	2x Optima YT S5,5L	3x Optima YT S5,5L
Recommended number of earth stakes	5x2m	6x2m
EU Standard	EN60335-2-76-A12	EN60335-2-76-A12
Dimensions (lxbxh mm)	345x95 x205	345x95 x205
Weight (Kg)	4,2	5,6



## Specifications of Multi Power energizers












MBS150 MBS300 MBS1000 MBS200 MBS400 MBS800














Part No.	388311	388328	301303	389318	390307	390314
Output Voltage (V)	8500	9100	8000	9000	9100	9200
Voltage with 500 Ohm (V)	5500	5900	7800	5800	6400	6700
Voltage with 100 Ohm load (V)	2200	2400	3800	2300	2300	2700
 Stored energy (Joules)	1,5	2,7	10	2	4	7,5
Output energy (Joules)	1,2	2	7	1,5	3	4,9
Multiwire Distance - ideal conditions (km)	15	25	45	20	30	40
Multiwire Distance - light growth (km)	10	16	28	13	19	29
Multiwire Distance - recommended (km)	4	6	11	5	8	10
Grid area (Hectare/Acre)	6/15	12/30	40/100	8/20	16/40	32/80
Current consumption power supply (W)	2,9	3,3	11	2,64	3,9	6,7
Current consumption battery (V/mA)	195/276	217/276	510/-	176/310	195/900	331/1000
 	▪	▪	▪	▪	▪	▪
 	▪	▪	▪	▪	▪	▪
	▪	▪	▪	▪	▪	▪
	▪	▪	▪	▪	▪	▪
Battery Save Mode	-	-	▪	▪	▪	▪
Battery LED (indicator)	▪	▪	▪	Bar-Graph	Bar-Graph	Bar-Graph
Power on/off	▪	▪	▪	▪	▪	▪
Built-in lightning diverter	▪	▪	▪	▪	▪	▪
Remote Control	-	-	o	-	-	-
Auto Power conservation to prevent damage to battery	▪	▪	▪	▪	▪	▪
Alarm indicator-LED fence voltage	-	-	▪	▪	▪	▪
Solar mode	-	-	-	▪	▪	▪
Battery only mode	-	-	-	▪	▪	▪
Night Save Option	-	-	-	-	-	-
Normal-Slow pulse	-	-	**	-	-	-
Random pulse mode	-	-	-	-	-	-
Adaptive control	-	-	▪	-	-	-
Delay with load	-	-	▪	-	-	-
Power supply included	-	-	-	▪	▪	▪
Suitable for solarpanel (W)	*20W	*30W	*2x60W	*20W solar kit (495217)	*40W solar kit (495415)	*60W
Recommended power supply	1x Optima YTR3,7L	1x Optima YTR3,7L	1x Optima YTS5,5L	1x Optima YTS5,5L	1x Optima YTS5,5L	1x Optima YTS5,5L
Recommended number of earth stakes	3x1m	4x1m	4x2m	4x1m	4x1m	4x2m
EU Standard	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A12	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11
Dimensions (lxbxh mm)	200x110 x220	200x110 x220	345x95 x205	200x110 x240	245x130 x290	245x130 x290
Weight (Kg)	1,7	1,6	2,6	1,9	2,4	2,5



## Specifications of 12V energizers

	B60	B100	B200	B300
				
Part No.	388304	392004	393001	394008
Output Voltage (V)	8000	10000	9000	10000
Voltage with 500 Ohm (V)	3500	3500	4300	5800
Voltage with 100 Ohm load (V)	1100	1100	1400	1600
 Stored energy (Joules)	0,6	0,8	1,5	2,6
Output energy (Joules)	0,4	0,55	1,1	2
Singlewire Distance -max length (km)	25	30	60	90
Multiwire Distance - ideal conditions (km)	6	10	20	30
Multiwire Distance - light growth (km)	2	5	7	10
Multiwire Distance - recommended (km)	1	3	5	8
Grid area (Hectare/Acre)	3/7	4/10	10/25	15/40
Current consumption (V/mA)	12/49	12/60	12/120	12/200
Current consumption safemode (mA)	-	35	40	71
9V/12V connection	- / ■	■ / ■	- / ■	- / ■
 	■	■	■	■
 	■	■	■	■
	■	■	■	■
	-	-	■	■
Battery Save Mode	-	■	■	■
Battery LED (indicator)	■	■	■	■
Power on/off	■	■	■	■
Auto Power conservation to prevent damage to battery	-	■	■	■
Half Power Option	-	■	■	■
Day Save Option	-	■	■	■
Night Save Option	-	■	■	■
Normal-Slow pulse	-	■	■	■
Random pulse mode	-	-	-	-
Earthpeg included	-	-	-	-
Power supply included	-	-	-	-
Suitable for solarpanel (W)	-	*10W	*20W	*30W
Recommended power supply	Optima YT S2,7L	Optima YT S2,7L	Optima YT S2,7L	Optima YTR3,7L
Recommended number of earth stakes	1x1m	2x1m	3x1m	4x1m
EU Standard	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11
Dimensions (lxbxh mm)	120 x 45 x 220	320 x 210 x 380	320 x 210 x 380	320 x 210 x 380
Weight (Kg)	1,4	3,58	3,58	3,7

## 9V energizers

	B10	B11	BA20	BA30	BA40	BA80
						
Part No.	003634	013534	356310	356303	356327	356358
Output Voltage (V)	7900	8200	9600	9600	9400	9400
Voltage with 500 Ohm (V)	1200	1500	1700	2000	1800/1400	2200/2000
Voltage with 100 Ohm load (V)	400	500	500	500	450/340	560/480
 Stored energy (Joules)	0,1	0,11	0,17	0,25	0,4	0,8
Output energy (Joules)	0,07	0,09	0,12	0,19	0,26	0,48
Singlewire Distance -max length (km)	2	2	3	5	18	24
Multiwire Distance - ideal conditions (km)	1	1	2	4	6	10
Multiwire Distance - light growth (km)	-	-	1,5	3	3	5
Multiwire Distance - recommended (km)	0,5	0,5	0,5	0,75	1,5	3
Grid area (Hectare/Acre)	0,5/1,3	0,5/1,3	0,8/2	1/2,5	2/5	4/10
Current consumption (V/mA)	9/15	9/20	9/24	9/34	9/43	9/90
Current consumption safemode (mA)	-	-	-	-	9/9	9/24
9V/12V connection	■ / ■	■ / ■	■ / ■	■ / ■	■ / ■	■ / ■
	■	■	■	■	■	■
	-	■	■	■	■	■
	■	■	■	■	■	■
	-	-	■	■	■	■
Battery Save Mode	-	■	■	■	■	■
Battery LED (indicator)	-	-	■	■	■	■
Power on/off	■	■	■	■	■	■
Auto Power conservation to prevent damage to battery	■	■	@12V	@12V	@12V	@12V
Half Power Option	-	-	-	-	■	■
Day Save Option	-	■	-	-	-	-
Night Save Option	■	■	-	-	-	-
Normal-Slow pulse	■	■	■	■	■	■
Random pulse mode	-	-	-	-	-	-
Earthpeg included	-	■	-	-	-	-
Power supply included	-	-				
Suitable for solarpanel (W)	-	-	-	-	-	-
Recommended power supply	6x1,5V	6x1,5V	9V/55Ah	9V/55Ah	9V/120Ah	9V/210Ah
Recommended number of earth stakes	1x0,5m	1x0,5m	1x0,5m	1x0,5m	1x1m	1x1m
EU Standard	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11
Dimensions (lxbxh mm)	80 x 80 x 175	110 x 110 x 290	280 x 160 x 295	280 x 160 x 295	280 x 160 x 295	280 x 160 x 295
Weight (Kg)	0,53	2,8	1,6	1,6	1,6	1,6

■ Standard / suitable for

◻ Optional


- Not compatible / not suitable for

\* Use only during Grazing season.  
\*\* Automatic



## Specifications of solar energizers



Part No.	349008	341309	349015	341316	341323	345307	346304	360300	361307
Output Voltage (V)	7500	7000	9200	6900	6900	7900	9600	9600	9600
Voltage with 500 Ohm load (V)	1000	1600	1700	2000	2100	2300	3600	4000	6000
Voltage with 100 Ohm load (V)	350	500	500	500	500	800	1000	1200	2400
 Stored energy (J)	0,08	0,1	0,12	0,16	0,2	0,40	1	2	4
Output energy (J)	0,06	0,08	0,08	0,13	0,14	0,29	0,74	1,6	3,1
Singlewire Distance - max length (km)	1	3	3,5	4,5	9	15	30	50	65
Multiwire Distance - ideal conditions (km)	0,5	1	1,5	1,5	3	5	10	20	30
Multiwire Distance - light growth (km)	0,2	0,5	0,7	0,8	1,5	3	5	10	16
Multiwire Distance - recommended (km)	0,1	0,3	0,4	0,5	1	1,5	3	5	7
Grid area (Hectare/Acre)	0,1/0,25	0,5/1,3	0,75/1,5	0,8/2	1,2/3	2/5	4/10	8/20	16/40
Current consumption (V/mA)	3,2V 39/29 day/night	6/14	3,2V 39/29 day/night	6/21	6/28	6/46	12/43	12/171	12/321
 	-	▪	▪	▪	▪	▪	▪	▪	▪
 	-	▪	▪	▪	▪	▪	▪	▪	▪
	-	▪	▪	▪	▪	▪	▪	▪	▪
	-	-	-	-	▪	▪	▪	▪	▪
Power on/off LED	▪	-	▪	-	▪	▪	▪	▪	▪
Battery LED (indicator)	▪	▪	▪	▪	▪	▪	▪	▪	▪
Battery Save Mode	-	▪	-	▪	▪	▪	▪	▪	▪
Auto Power conservation to prevent damage to battery	-	-	-	-	▪	▪	▪	▪	▪
Half Power Option / Wildlife	-	-	-	-	-	-/▪	-/▪	-/▪	-/▪
Night Save Option	-	▪	-	▪	▪	▪	▪	▪	▪
Normal-Slow pulse	-	-	-	-	-	▪	▪	▪	▪
Lead set to connect the energizer to the fence and earthing	▪	▪	▪	▪	▪	▪	▪	▪	▪
Solarpanel (W)	2,2W	1,5W	2,2W	1,5W	1,5W	4W	7W	20W	40W
Recommended power supply	3,2V-6AH	6V-4Ah	3,2V-6AH	6V-4Ah	6V-4Ah	6V-10Ah	12V-7.2Ah	*2x 12V-7.2Ah	*2x 12V-7.2Ah
Battery included	▪	▪	▪	▪	▪	▪	▪	▪(2x)	▪(2X)
Recommended number of earth stakes	1x0,5m	1x0,5m	1x0,5m	1x0,5m	1x1m	1x1m	2x1m	2x1m	4x1m
EU Standard	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11	EN60335-2-76-A11
Dimensions (lxbxh mm)	140 x 50 x 165	170 x 175 x 245	140 x 50 x 165	170 x 180 x 250	170 x 180 x 250	205 x 305 x 275	215 x 355 x 310	330 x 305 x 472	660 x 305 x 472
Weight (Kg)	0,93	1,9	0,93	1,9	2,1	4	5	12,2	14,4

▪ Standard / suitable for      o Optional      - Not compatible / not suitable for

WEEE Directive 

Our energizers are marked in accordance with the European Directive 2012/19/EU regarding Waste Electrical and Electronical Equipment (WEEE Directive). In case you want to dispose of energizer, you may not treat this device should not be treated as municipal waste. The device should be delivered to the selling point where you have bought this or returned without charge to Gallagher Europe. By doing so you contribute to the processing of the device in an appropriate manner and to the prevention of possible harmful consequences for the environment and public health.



## Gallagher

12V 7,2Ah Battery S100, S200, S400	26, 27	Horse post	46	Solar Powerstation MBS800	5, 18, 30
12V Battery	31	Horse-Fly Magnet	79	Spring gate set	67
12V Battery Backup system	17, 18, 19	HT zinc-alu-mag wire 2,5mm - 25kg - 625m	81	Spring steel pigtail post	45
12V Optima Yellowtop	31	i Series Alarm System	38	Spring steel post	45
12V SLA Battery	31	i Series Automatic Transfer Switch	38	Starter kit M10 230V	74
12V/85Ah LA - 278x175x190mm	24	i Series Fence Monitor	37	Strain insulator reinforced white (5)	81
20W Solarpanel + Bracket	18	i Series Remote Controller	37, 41, 19	Strain insulator S	59
40W Solarpanel + Bracket	18	i Series SMS Controller	38	Strain insulator S reinforced	59
6V 10Ah Battery S40	27, 32	i Series WiFi Gateway	12, 13, 37	Stranded wire	49
6V 4Ah Battery S10, S16, S20	28	incl. 2x Afrastering monitor (1x gratis) en afstandsbediening	12	Tape connector	65
6V Round Alkaline battery	32	Insulated End Strainer	64	Tape joiner	65
6W assist kit	20	Insultimber (FSC®)	42	Tension spring	64
9V Powerpack Alkaline battery	32	Insultimber (FSC®) Strainer post 200x8x8cm (1)	81	Terra 250m	5
9V/175Ah - 190x125x160mm	22, 23	Insultimber (FSC®) Strainer post 250x10x10cm (10x1)	81	Top mount double end Ring Top offset 80cm	63
9V/210Ah - 190x125x160mm	22	Insultimber (FSC®) Strut 200x4x8cm (1)	81	Triple Geared Reel Stand pre-installed	54
Aluminum warning sign	40	Joint clamp	64	TurboLine Blue Polywire	51
B10 - excl. 6x1,5V	25	Joint clamp angle	63	TurboLine corner/strain insulator	61
B100	20	Joint clamp angle with wingnut (10)	81	TurboLine Horse corner/strain insulator	60
B11	25	Knife Cut-Off Switch	39	TurboLine Horse insulator	61
B200	20	Krokodillenkleem	39	TurboLine Line Post tape clip	60
B200+6W solar assist	20	Large geared reel 1200m	54	TurboLine rope	51
B300	20	Lead out cable	35	TurboLine tape	52
B60 - 12V/0,6J	24	Lead out cable XL Red	35	TurboLine tape insulator	61, 67
BA20	23	Length 90cm	26, 28	TurboStar Equifence	49
BA30	23	Lightning diverter	39	TurboStar tape	52
BA40	22	Line Post Accessories	77, 78	Universal post Lifter	77
BA80	22	Live fence indicator	41	Vandal proof box	36
Batt-Latch Gate Release Timer	68	Live Tip Offset bolt-on insulator 26cm/M6	62	Vidoflex 12 TurboLine Plus	50
Battery Charger CTEK	32	Live Tip offset insulator steel post 16cm	63	Vidoflex 3 PowerLine	50
Battery for FoxlightS	32	Live Tip offset insulator wood 26cm	62	Vidoflex 6 PowerLine	50
Bentonite	34	Loadbar set	91	Vidoflex 9 TurboLine Plus White 200m	81
Birth Alarm Lite 2.0	93	M120	16	Vidoflex connector	65
Birth Alarm Mobile + WiFi Camera	93	M1400	14	W-insulator Small	58
Birth Alarm Premium	93	M160	16	W-insulator Super	58
Bracket for B100/B200/B300	20	M1800i	13	White 250m	5
Cat kit for fence	75	M2800i excl. accessories	13	Wire clip insulator for Gallagher Line Post (20)	81
Cat kit for fence with M10	5	M2800i incl. accessories	13	Wire clip insulator for Line Post	56
Clip lock strainer	64	M35	16	Wire dispenser	77
Clips for Insultimber/Ecopost	60	M350	15	Wire tensioner	64, 78, 81
Compression gate handle	68	M50	16	Wire twister	76
Corner insulator Extra High Voltage	58	M5000i	12	Wolf netting, Blue	72
Cut out switch	39	M550	15	XDI bolt-on insulator M6x23mm metal	57
Deer post plastic	46	M650	15	XDI offset bolt-on insulator metal 20cm/M6	62
Drill chuck Basic	76	M950	14	XDI offset screw-in insulator wood 10cm	61
Drill chuck Pro	76	Marten kit	75	XDI offset screw-in insulator wood 18cm	61
Drive thru Electro gate	66	Marten kit with M50 230V	5	XDI offset screw-in insulator wood bended 18cm	62
Dual Purpose Portable handle	68	MB series 12V Battery Backup system	38	XDI screw-in insulator wood	56
Duopack Alkaline battery 2x 9V/175Ah - 190x125x160mm	7	MB150	19	Zinc-alu-mag wire	48, 49
Duopack TurboLine Blue Polywire 2x400m	7	MB300	19		
Duopack TurboLine rope	51	MBS1800i	17		
Duopack TurboLine rope braided Terra 2x200m	7	MBS200	18		
Duopack TurboLine rope braided Terra 2x500m	7	MBS2800i	17		
Duopack TurboLine rope braided White 2x200m	7	MBS400	18		
Duopack TurboLine rope braided White 2x500m	7	MBS800	18		
Duopack TurboLine tape	52	Medium reel 500m	55		
Duopack TurboLine tape 12,5mm White 2x200m	7	Mobile fence gate	66		
Duopack TurboLine tape 12,5mm White 2x400m	7	Mount Solar post S10, S16, S20	28		
Duopack Vario post	46	Mounting bracket 40/60mm	62		
Duopack Vario post terra 1,00m (2x10)	7	MT-Trap	79		
Duopack Vario post white 1,00m (2x10)	7	Multi strand gate kit	67		
Duopack Vidoflex 9 TurboLine Plus	50	Multi Wire Ring Top Post	44		
Duopack Vidoflex 9 TurboLine Plus White 2x200m	7	Neontester	41		
Duopack Vidoflex 9 TurboLine Plus White 2x1000m	7	Offset Chainlink Insulator cainlink 30cm	63		
Duopack Vidoflex 9 TurboLine Plus White 2x400m	7	Offset Pigtail insulator wood 17,5cm	63		
Earth stake	34	Offset Pigtail insulator wood 40cm	63		
Earth Stake Stand for BA	23	Offset Pinlock Insulator wire 30cm	63		
Earthing accessories	34, 35	Offset screw-in insulator 20cm	62		
Eco post	43	Offset screw-in insulator wood 10cm	62		
EconomyLine rope	51	Pet kit 80cm S6 Solar	5, 74		
Econoreel 500m	55	Pigtail post	45		
Elastic rope gate set	67	Plastic post	47		
Electric fence Keyring Beeper	41	Plastic post black 13mm 0,98m (10)	4		
Electrified steel gate	66	Plastic post blue 13mm 0,70m (10)	81		
ElectroMax wire	48	Plastic Wolf post 1,50m, white (10)	4, 45		
Equifence	49	Porcelain corner insulator	59		
EU Warning sign	40	Porcelain strain/corner insulator	59		
EuroNetz Combo netting	73	Post holer 100mm	77		
EuroNetz Gate for electric netting	71	Post holer 75mm	77		
EuroNetz Goat netting	71	Poultry kit B60	75		
EuroNetz Poultry netting	72	PowerLine rope	51		
EuroNetz Poultry netting, Orange 112/2-15/G-50m	81	PowerLine tape	53		
EuroNetz Rabbit netting/Hobby netting	71	PowerLine tape insulator	61		
EuroNetz repair set	74	Quattro post	45		
EuroNetz Sheep netting	70, 71	Rammer	77		
EuroNetz Turbo netting	73	Rasterspin kit (5)	47		
EuroNetz Wild boar netting	73	Reel 200m	55		
EuroNetz Wolf netting	72	Reel 400m	55		
Farmer pliers	76	Reel/Termination post	55		
Fault Finder	41	Remote controller for i Series	12, 13		
Fence Insulator for pos/neg system	62	Retractable auto reel	67		
Fence monitor for i Series	12, 13	Ring Top post	45		
Fence Volt Meter	41	Roller bolt-on insulator	60		
Fibreglass post	47	Roller screw-in insulator	59, 60		
Flood gate controller	39	Rope connector	65		
Foaling alarm	93	Rope connector with wingnut	65		
For HT/EQ ø2,5mm/2,65mm	81	Rope tensioner	59		
For MB/MBS series Energizers	19	S10 incl. battery	28		
For MBSi series Energizers	17, 18	S100 incl. battery	27		
FoxlightS	75, 81	S12 incl. Lithium battery	4, 29		
Gallagher Insulated Line Post	43	S16 incl. battery	28		
Gallagher Insulated Line Post 1,40m (4)	81	S20 incl. battery and mount	28		
Gallagher Insulated Line Post Dropper 0,95m 5 wire (10)	81	S200 incl. batteries	26		
Gallagher pliers	76	S220 (B200+20W+Optima 2,7I)	21		
Gallagher Screws	76	S230 (B200+30W+Optima 3,7I)	21		
Gallagher Solarbox	36	S40 incl. battery	27		
Garden kit 50cm with M35 230V	5	S400 incl. batteries	26		
Garden kit 80cm	5	S6 incl. Lithium battery	4, 29		
Garden kit 80cm with M35 230V	5	Screw-in Insulator Promopack	57		
Garden/Pond post	47	Screw-in insulator super in bucket (175)	57		
Gate break joiner	65	Screw-in insulator wood	57		
Gate handle	68	Screw-in insulator wood small	57		
Gate handle anchor	69	Screw-in insulator wood Super	58		
Geared reel 500m	55	Screw-on rod insulator closed version	64		
Geared reel pre-installed Polywire 500m	55	Sledge hammer	77		
H-Trap	79	SmartFence 2.0	74, 81		
Handle for tensioner	64	SMS controller for i Series	12, 13		
Heavy Duty Loadbar set	91	SMS fence alarm	39		
Heron kit M10	75	SMS remote control (GSM)	39		
High Strain insulator Kit with stainless steel rope	59	SnailFence kit M10	75		
Hobby post	46	Soft touch gate handle	68		
Hobby post white 0,75m (10)	81	Solar panel	33		
		Solar panel bracket	33		
		Solar panel regulator	33		
		Solar Powerstation MBS1800i	5, 17, 30		
		Solar Powerstation MBS2800i	5, 17, 30		

## Weighing and EID systems

SmartReader HR4	91
SmartReader HR5	91
TW-1 Wiegecomputer	90
TW-3 Wiegecomputer mit Datensammler	90
TWR-1 Wiegecomputer und EID Leser	90
TWR-5 Wiegecomputer und EID Leser	90
Wiegecomputer WO	89
Wiegestangen Set 1500kg - 580mm	91
Wiegestangen Set 2500kg - 1000mm	91
Wiegestangen Set 2500kg - 600mm	91
Wiegestangen Set 5000kg - 1000mm	91

## Birth Alarm

Birth Alarm Advanced	92
Birth Alarm Classic 433MHz	93
Birth Alarm Classic Komplettssystem	93
Birth Alarm Lite 2.0	93
Birth Alarm Mobile + WiFi Kamera	93
Birth Alarm Mobile Komplettssystem	93
Birth Alarm Premium	93
exkl. Mobiltelefon/SIM-Karte	93
PoE-Kamera	93
Wifi-Kamera	93





## WE KEEP YOU INFORMED ONLINE!

### ORDER NOW ONLINE

It is easy to order your products from our website and pick it up at your preferred dealer. You can find our entire range on the website. If you are not sure which components you need for your fencing please consult your dealer or contact Gallagher. We are all pleased to give you customised advice!

[www.gallagher.eu](http://www.gallagher.eu)

### SUBSCRIBE TO OUR YOUTUBE CHANNEL

Discover how you can check your Gallagher fence or install an energizer. It also has all the information about our latest products. All in easy and short videos. Subscribe quickly and stay up to date!

[www.youtube.com/GallagherEuropeBV](http://www.youtube.com/GallagherEuropeBV)

**Your Gallagher dealer:**

**Important information! For all promo's available while stock lasts.**

Colour and appearances may slightly differ to those of the actual items.



8 713235 061631

1133EXP0 2021